



# Designing with Nature: LID & Stormwater Quality Treatment with Compost BMPs

Dr. Britt Faucette, PhD, CPESC, LEED AP  
Director of Research/Technical Services,  
Filtrex International



July 18, 2014

# Outline

- Stormwater: Gray to Green Infrastructure (LID)
- Compost & Stormwater Volume and Quality
- Compost Applications (BMPs)
- Research, Performance, & Design
- Case Study
- Q/A

# Stormwater Impact



- 850 - US cities w/ outdated & under-designed SWM infrastructure
- 75% of Americans live near polluted waters
- 48,800 TMDL listed (impaired) water bodies
- \$44,000,000,000 – annual total cost to society




# Grey Infrastructure is..\$\$\$\$\$\$



- ✓ Centralize Collection, Conveyance & Treatment
- ✓ Land Intensive
- ✓ Infrastructure Intensive
- ✓ Pollution Intensive
- ✓ Energy Intensive



# Land Use = Hydrology = Pollutant Load = Water Impairment

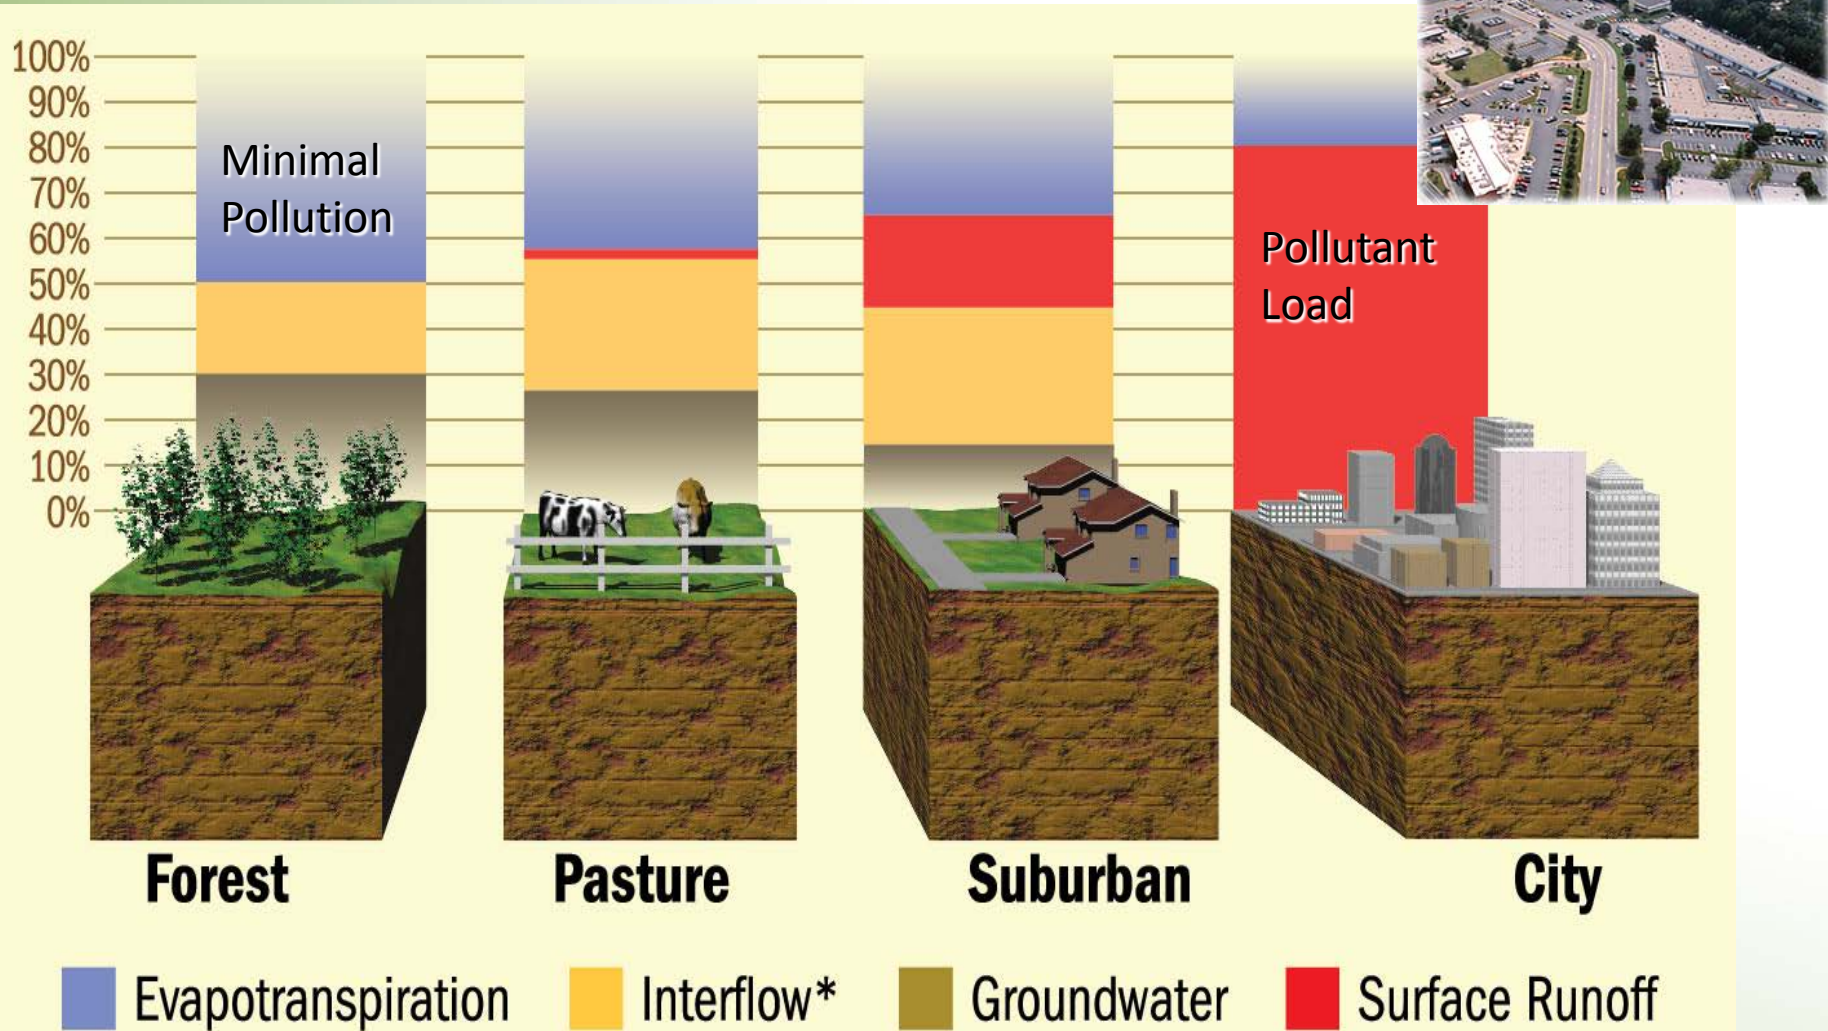

Source: Sego Jackson, 2001

\*water that travels just below the surface

# 75% of Us Live Near a Polluted Water



- Coliform bacteria (10,900 streams)
- Metals – Cu, Cd, Cr, Ni, Pb, Zn (8600 streams)
- Nutrients – N & P (5300 streams)
- Turbidity/TSS - Clay & Fine Silt Sediment (5100 streams)
- Petroleum Hydrocarbons - Motor Oil, Diesel Fuel, Gasoline (polycyclic aromatic hydrocarbons)



# Storm Water Pollution Areas

## What

- Parking Lots, Highways/Streets, Rooftops
- Golf Courses, Lawns, Pet Parks

## Who

- NPDES Stormwater Permits:
- MS4s, Industrial, Construction
- CAFOs, CSOs

Sources



- ✓ Trout/Salmon bearing
- ✓ Endangered species
- ✓ Eutrophic water bodies
- ✓ Beaches/Recreational
- ✓ TMDL designated streams

Priority Areas

# Low Impact Development (LID) =


hydrology mimics natural site, distributed, decentralized

- Runoff Volume ↓
- Runoff Rate ↓
- Pollutant Loading ↓
- Flooding ↓
- CSOs ↓
- ✓ *Water Quality* ↑
- ✓ *Wildlife Habitat/Biodiversity* ↑
- ✓ *Aesthetics/Land Value* ↑



Green Infrastructure = green stormwater management; site preservation/restoration; integrated design & practices; reuse



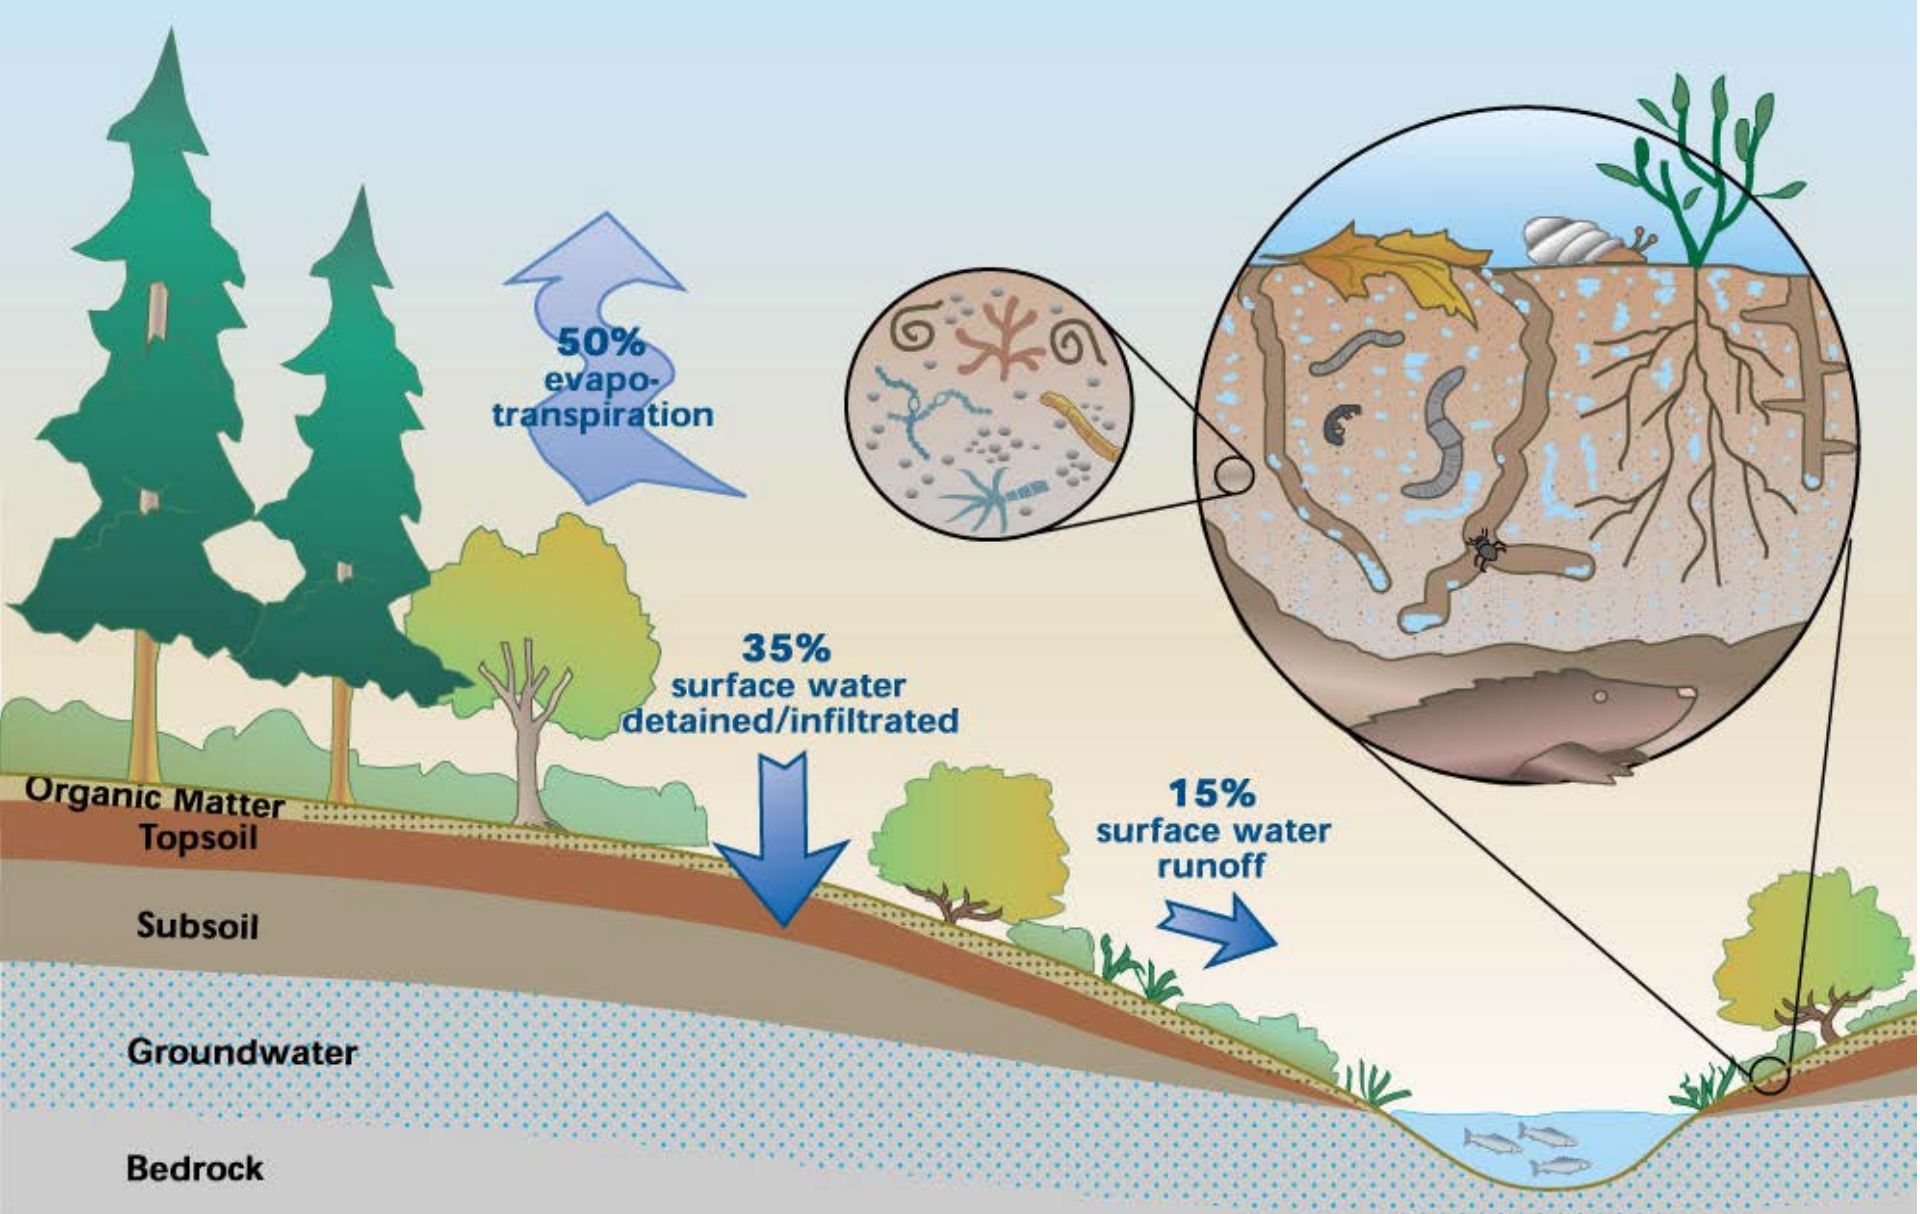

Low Impact Development (LID) =  
restore natural site hydrology; decentralize

# Compost Tools

## Filter Media

- Designed for Optimum Filtration & Hydraulic-flow



## Growing Media

- Designed for Optimum Water Absorption & Plant Growth





# Stormwater BMPs

## Erosion & Sediment Control

1. Perimeter Control
2. Inlet Protection
3. Ditch Check
4. Filter Ring/Concrete washout
5. Slope Interruption
6. Runoff Diversion
7. **Vegetated Cover**
8. **Erosion Control Blanket**
9. Vegetated Sediment Trap
10. Pond Riser Pipe Filter


## Low Impact Development

11. **Runoff Control Blanket**
12. **Vegetated Filter Strip**
13. **Engineered Soil**
14. Channel Liner
15. Streambank Stabilization
16. Biofiltration System
17. **Bioretention System**
18. **Green Roof System**
19. Living Wall
20. Green Retaining Wall
21. **Vegetated Rip Rap**
22. Level Spreader
23. Green Gabion
24. **Bioswale**

# Sediment Control/ Stormwater Filter BMPs

- Silt Fence
- Straw Bale
- Mulch Berm
- Fiber Rolls
- Straw Wattles
- Filtration/Active Treatment Systems
- Chemical Treatment
- Stormwater Ponds


# Natural Stormwater Management

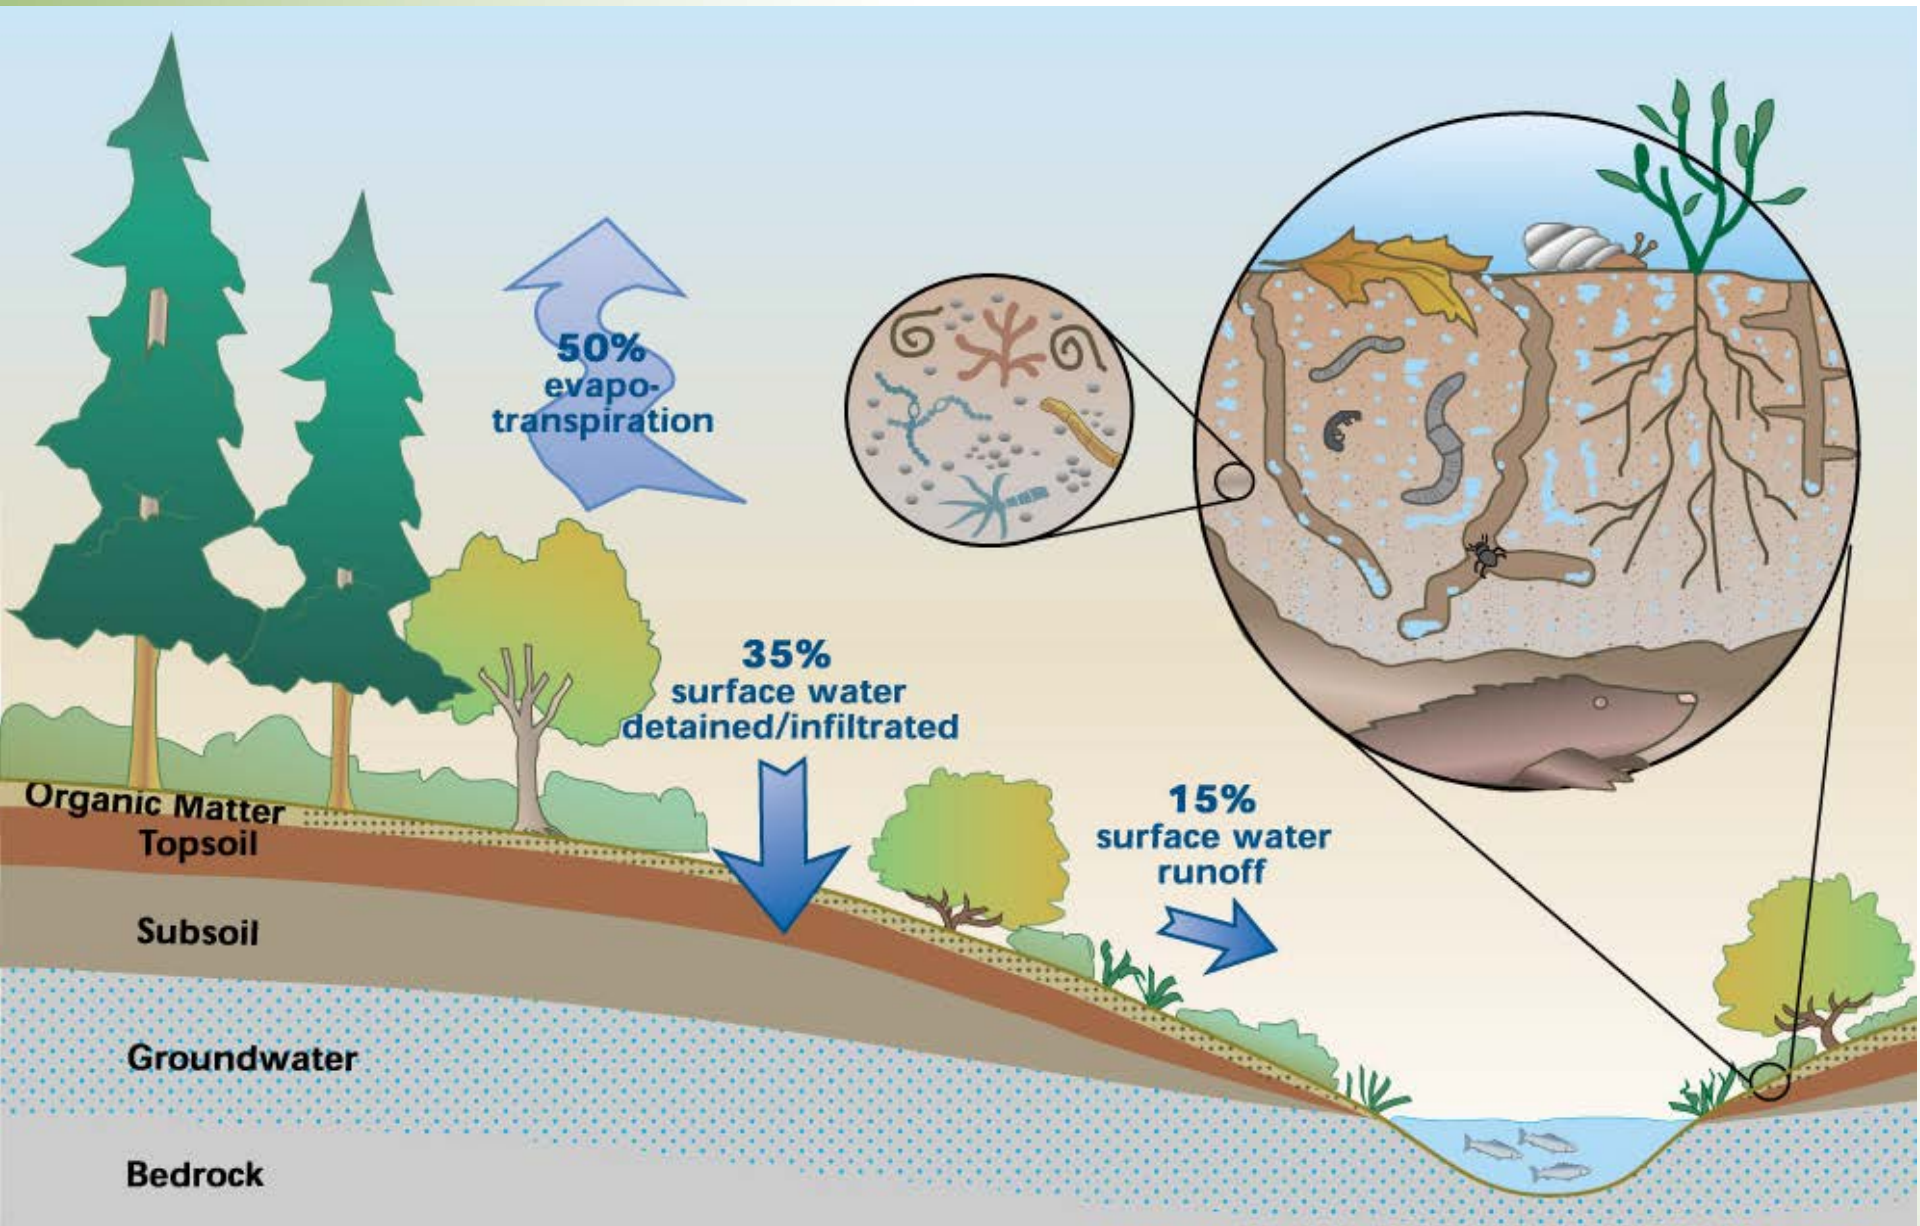

# Compost Sock

## 3-Way Biofiltration


- Physical
  - Traps sediment in matrix of varying pore spaces and sizes
- Chemical
  - Binds and adsorbs pollutants in storm runoff
- Biological
  - Degrades various compounds with bacteria and fungi

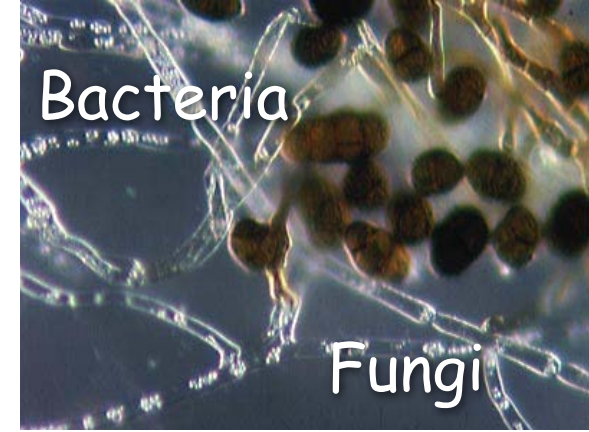

# Particle Size Specifications



**FILTER MEDIA SPECIFICATIONS AND THEIR PERFORMANCE**

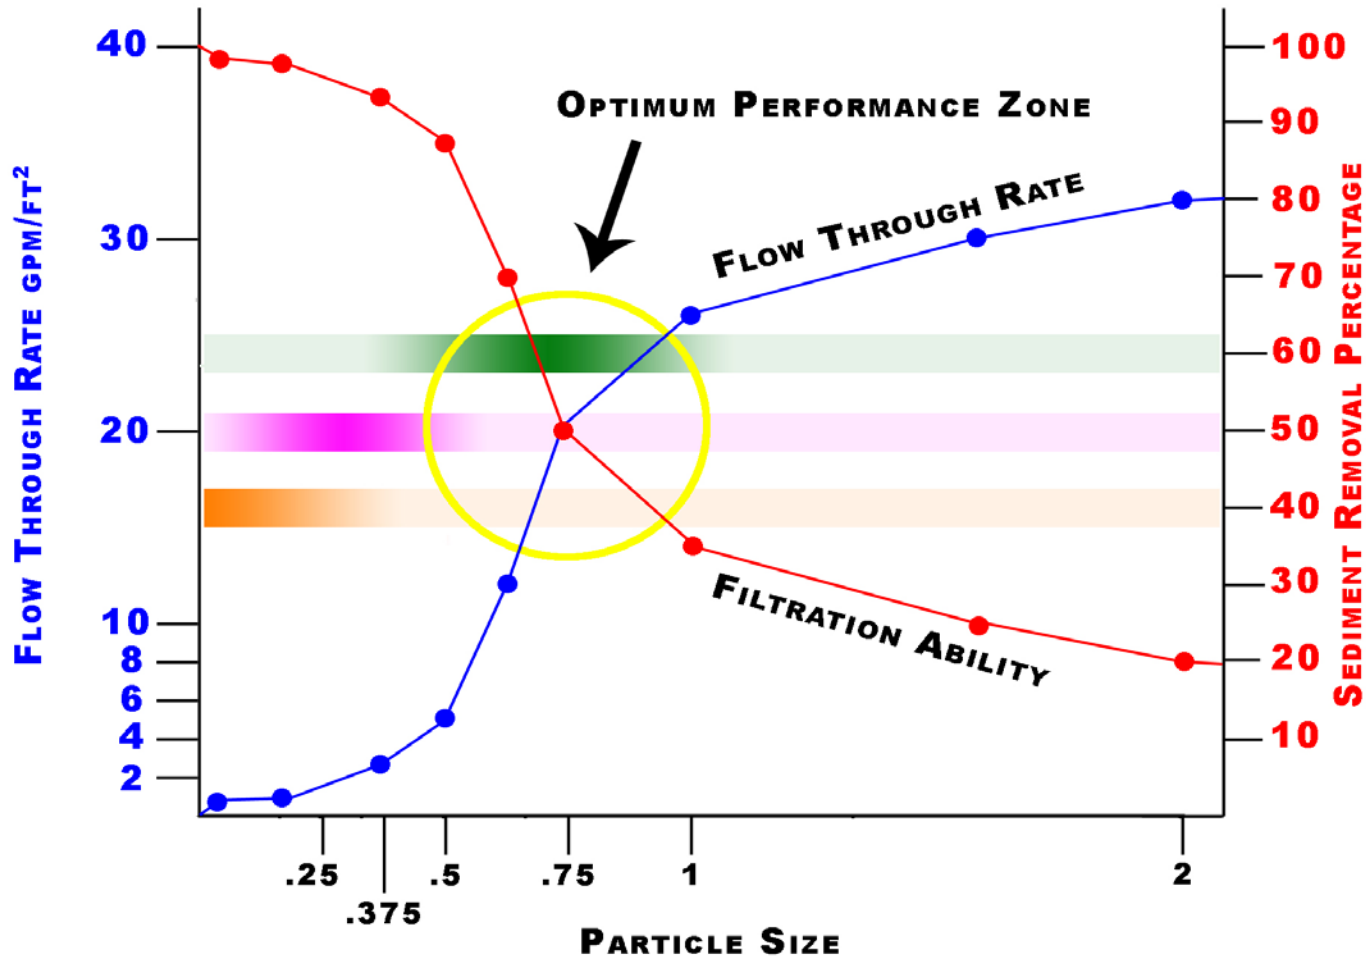






(Bio) Filtration

Devices use

Filter Media

# TS Reduction of Sediment Barriers


 SAN DIEGO STATE UNIVERSITY	Runoff Exposure	Sediment Exposure	Removal
Filter Sock	<ul style="list-style-type: none"> <li>•260 gal</li> <li>•1.7 g/ft<sup>2</sup></li> <li>•2.75 ac-in</li> </ul>	<ul style="list-style-type: none"> <li>•850 lbs</li> <li>•150 lbs/ft<sup>2</sup></li> <li>•125 t/a</li> </ul>	77%
Silt Fence	<ul style="list-style-type: none"> <li>•260 gal</li> <li>•1.7 g/ft<sup>2</sup></li> <li>•2.75 ac-in</li> </ul>	<ul style="list-style-type: none"> <li>•850 lbs</li> <li>•150 lbs/ft<sup>2</sup></li> <li>•125 t/a</li> </ul>	72%
Straw Wattle	<ul style="list-style-type: none"> <li>•260 gal</li> <li>•1.7 g/ft<sup>2</sup></li> <li>•2.75 ac-in</li> </ul>	<ul style="list-style-type: none"> <li>•850 lbs</li> <li>•150 lbs/ft<sup>2</sup></li> <li>•125 t/a</li> </ul>	59%

ASTM 6459 for RECPS

# % TSS Reduction of Sediment Barrier



The University of Georgia

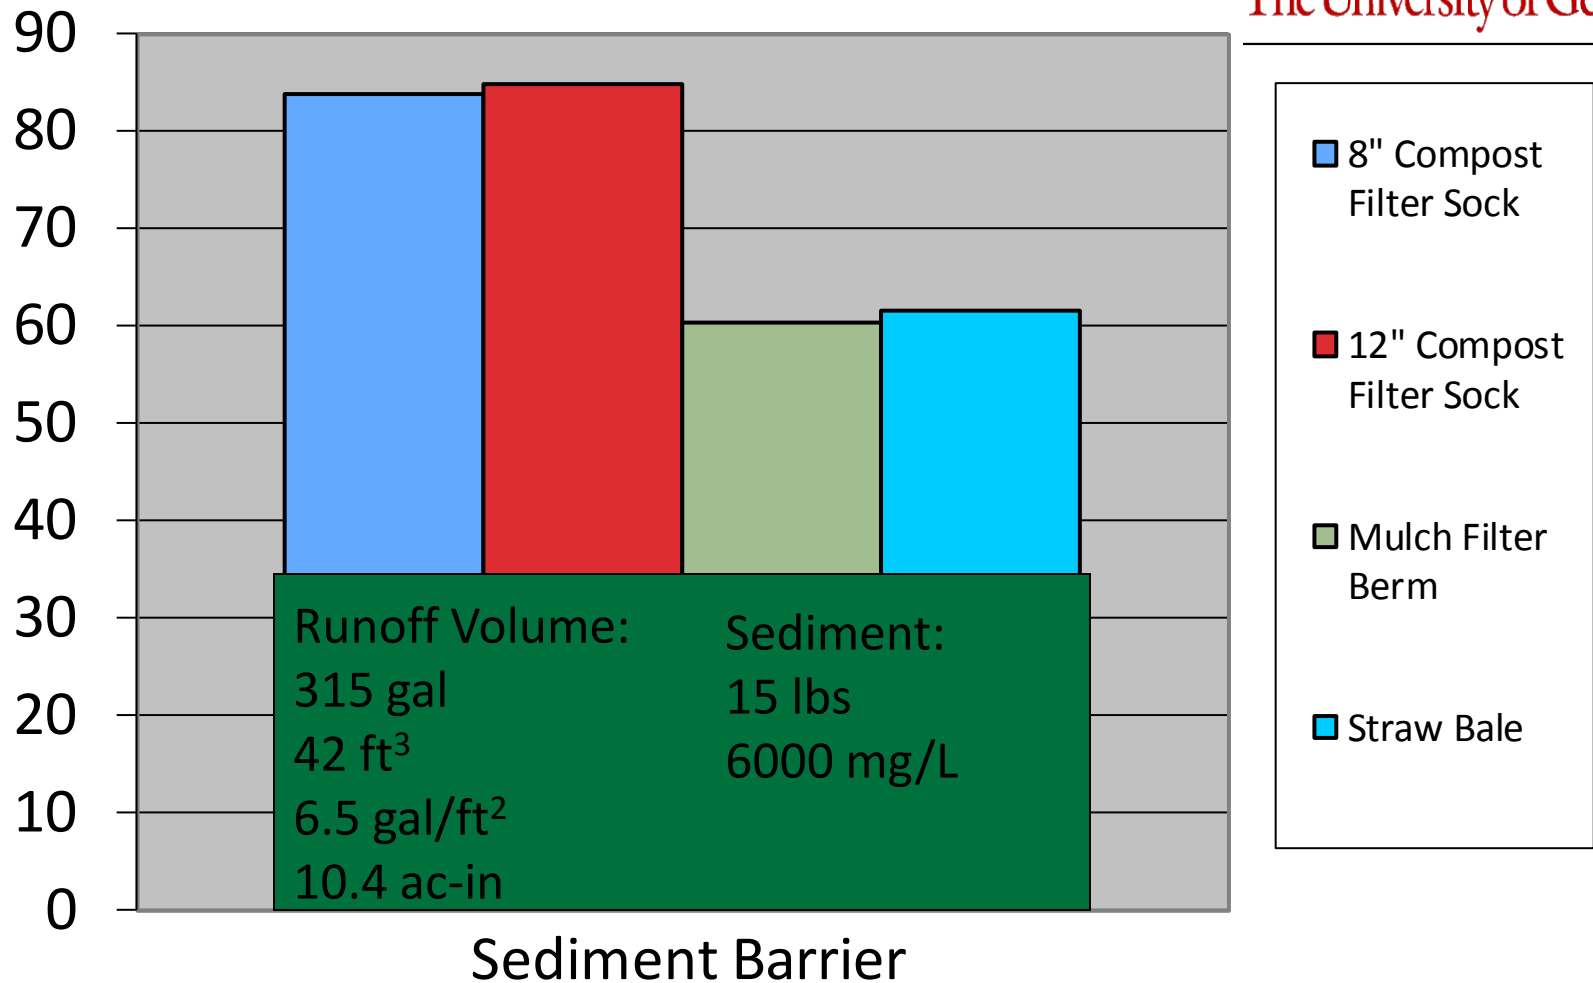

# Sediment Summary



## % Reduction of TSS & Turbidity

Treatment	TSS	Turbidity
Silt Fence	67	52
Filter Sock	78	63

\* Based on rainfall of 3.0 in/hr for 30 min; runoff sediment concentration (sandy clay loam) of 70,000 mg/L.



# Stormwater Pollutant Removal

	TSS	Turbidity	Total N	NH <sub>4</sub> -N	NO <sub>3</sub> -N	Total P	Sol. P	Total coli.	E. coli.	Metals	Oil	Diesel
Filter Sock	80%	63%	35%	35%	25%	60%	92%	98%	98%	37-78%	99%	99%



# Stormwater Pollutant Removal w/ Filter Socks

- Britt Faucette<sup>1</sup>, Fatima Cardoso<sup>1&2</sup>,  
Eton Codling<sup>2</sup>, Carrie Green<sup>2</sup>, Dan Shelton<sup>2</sup>,  
Yakov Pachepsky<sup>2</sup>, Gregory McCarty<sup>2</sup>, Andrey  
Guber<sup>2</sup>
  1. Filtrexx International, Atlanta, GA;
  2. USDA-ARS, Beltsville, MD



# Compost + Additives


- To target specific runoff pollutant
  - Fine Sediment
  - Nutrients (N & P)
  - Bacteria
  - Metals
  - Petroleum Hydrocarbons



# Fine Sediment Removal




FilterSoxx Fine Sediment Removal over 30 min Runoff Event

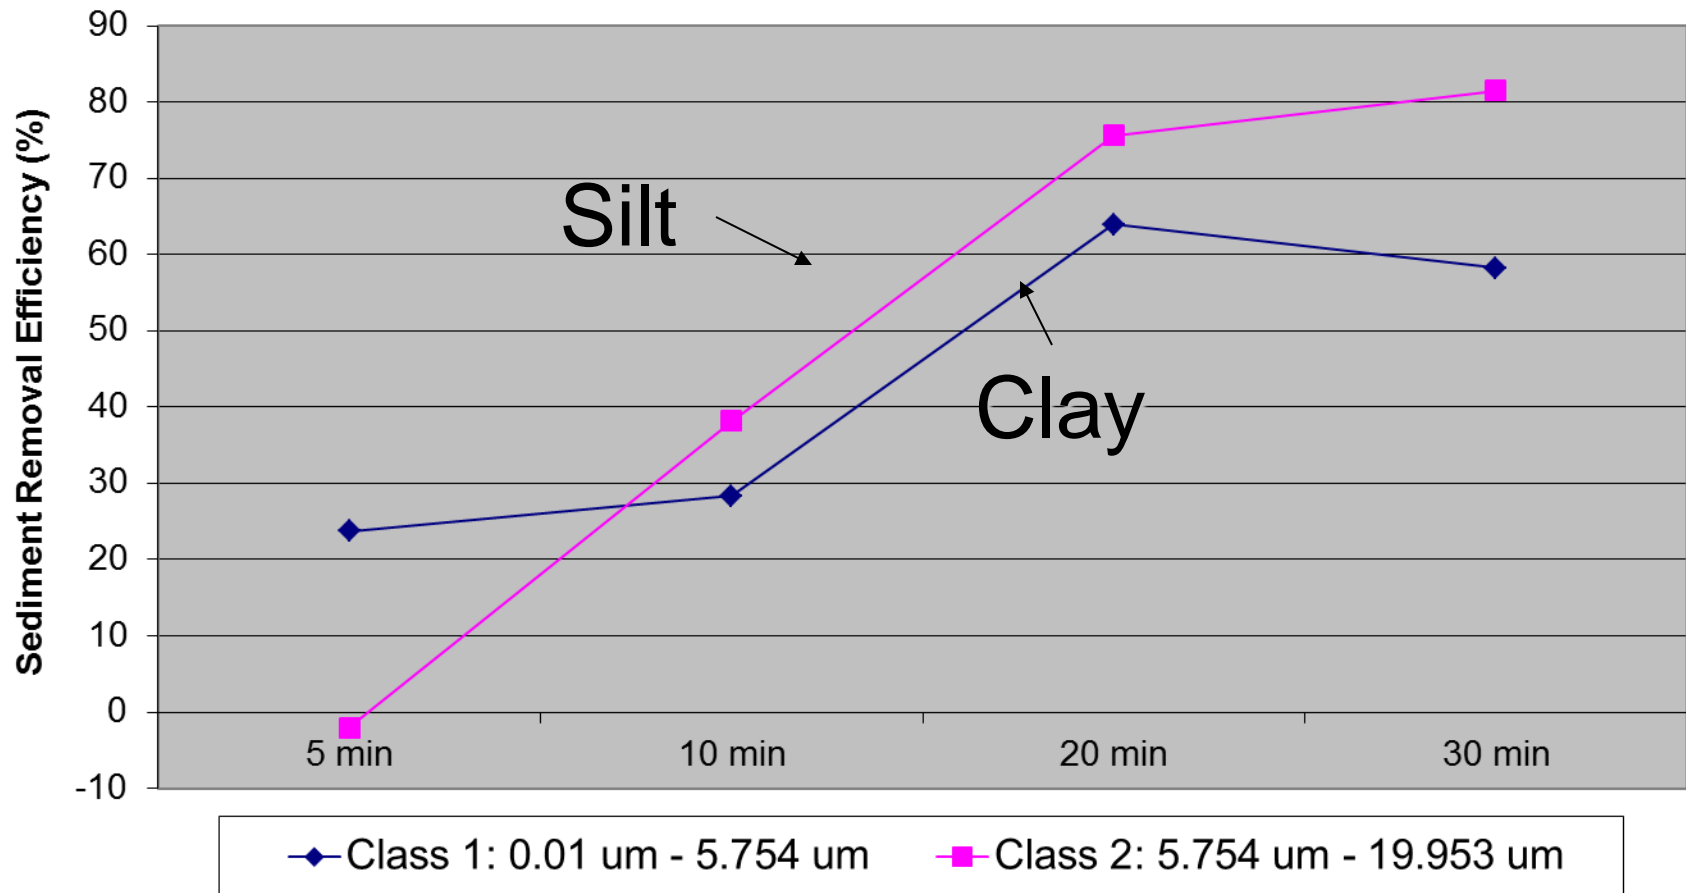



# Soluble P

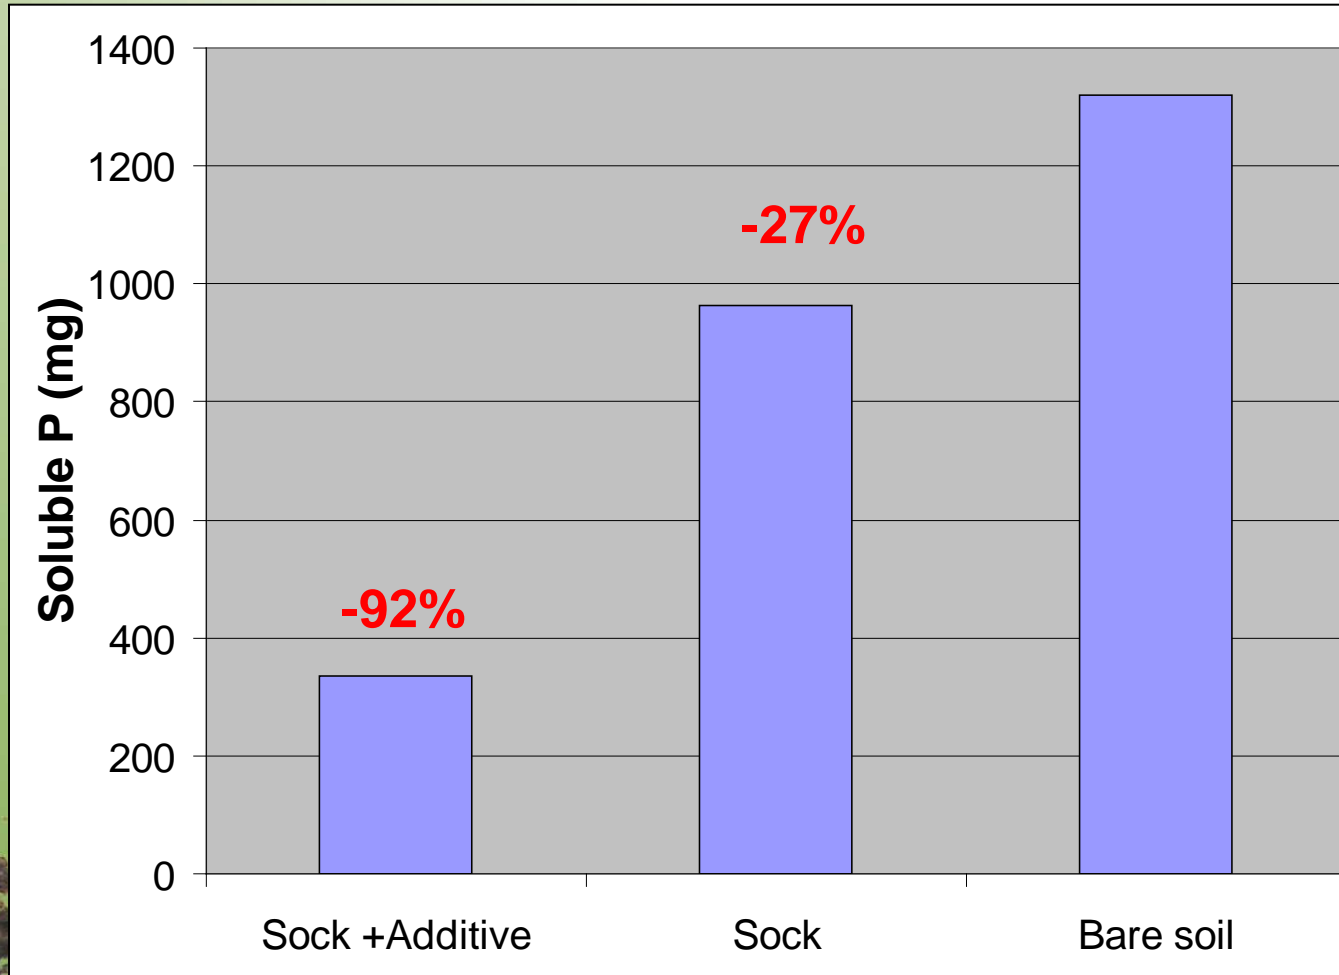


# Nitrogen Removal

## Runoff N

**NH<sub>4</sub>-N =  
85 mg (5.6 mg/L)**


**NO<sub>3</sub>-N =  
72 mg (4.8 mg/L)**

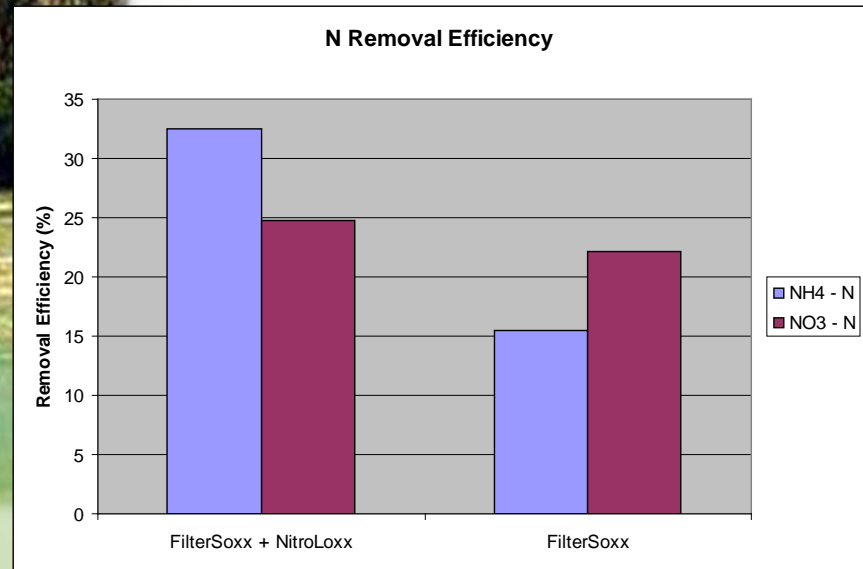

+ Additive


Filter Sock

# Bacteria Removal

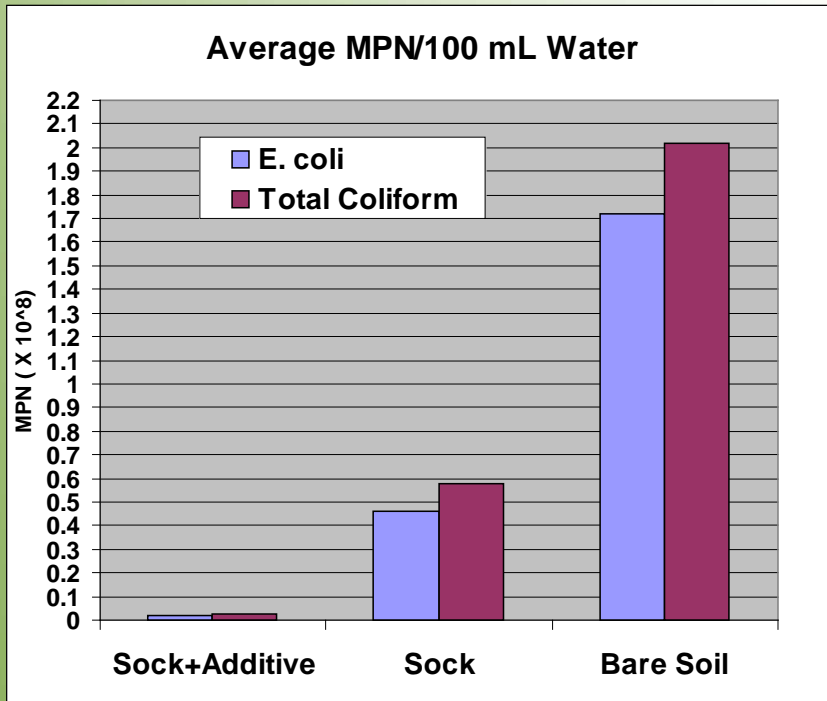

## Bacteria (MPN) Exposure

- Total coliform – 200 million/100 mL
- E. coli – 170 million/100 mL
- *Typical* – 50,000/100 mL

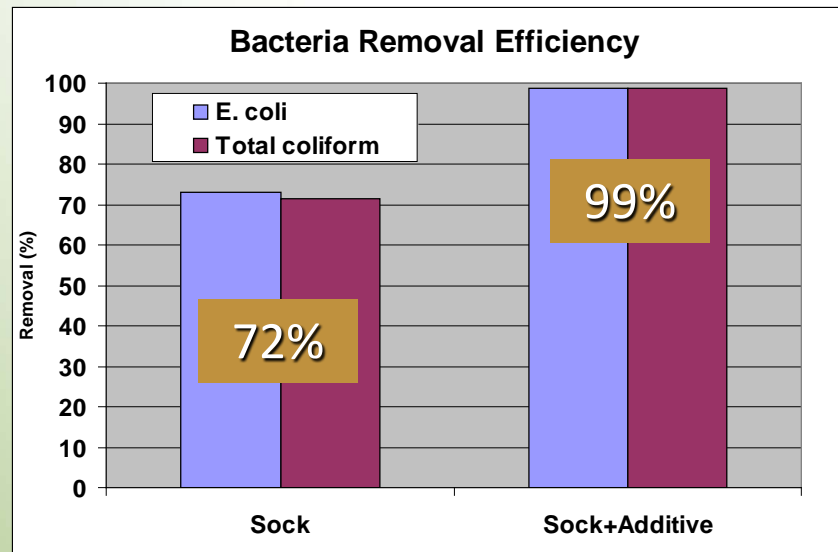


# Metals Removal

		METALS (water extractable)					
Treatment	Parameters (mg)	Cd	Cr	Cu	Ni	Pb	Zn
<b>FS + MetalLoxx</b>	Applied	7.915	6.740	7.320	8.070	6.025	6.545
	Soil Surface	0.004	0.019	6.491	0.144	0.154	2.028
	Total	7.919	6.759	13.811	8.214	6.179	8.573
	Transported to Soxx	0.812	0.490	1.640	1.056	0.937	1.669
	Runoff Water	0.210	0.221	0.383	0.301	0.144	0.621
	Removal Efficiency*	<b>72</b>	<b>29</b>	<b>70</b>	<b>69</b>	<b>79</b>	<b>57</b>
	Runoff Sediment	0.014	0.039	0.122	0.029	0.105	0.161
	Removal Efficiency*	<b>77</b>	<b>78</b>	<b>45</b>	<b>63</b>	<b>61</b>	<b>47</b>
	Total Runoff	0.224	0.260	0.505	0.330	0.249	0.782
	<b>Removal Efficiency (%)</b>	<b>73</b>	<b>47</b>	<b>70</b>	<b>69</b>	<b>73</b>	<b>53</b>

\*Relative to Bare Soil w/out Treatment

# Petroleum Hydrocarbons

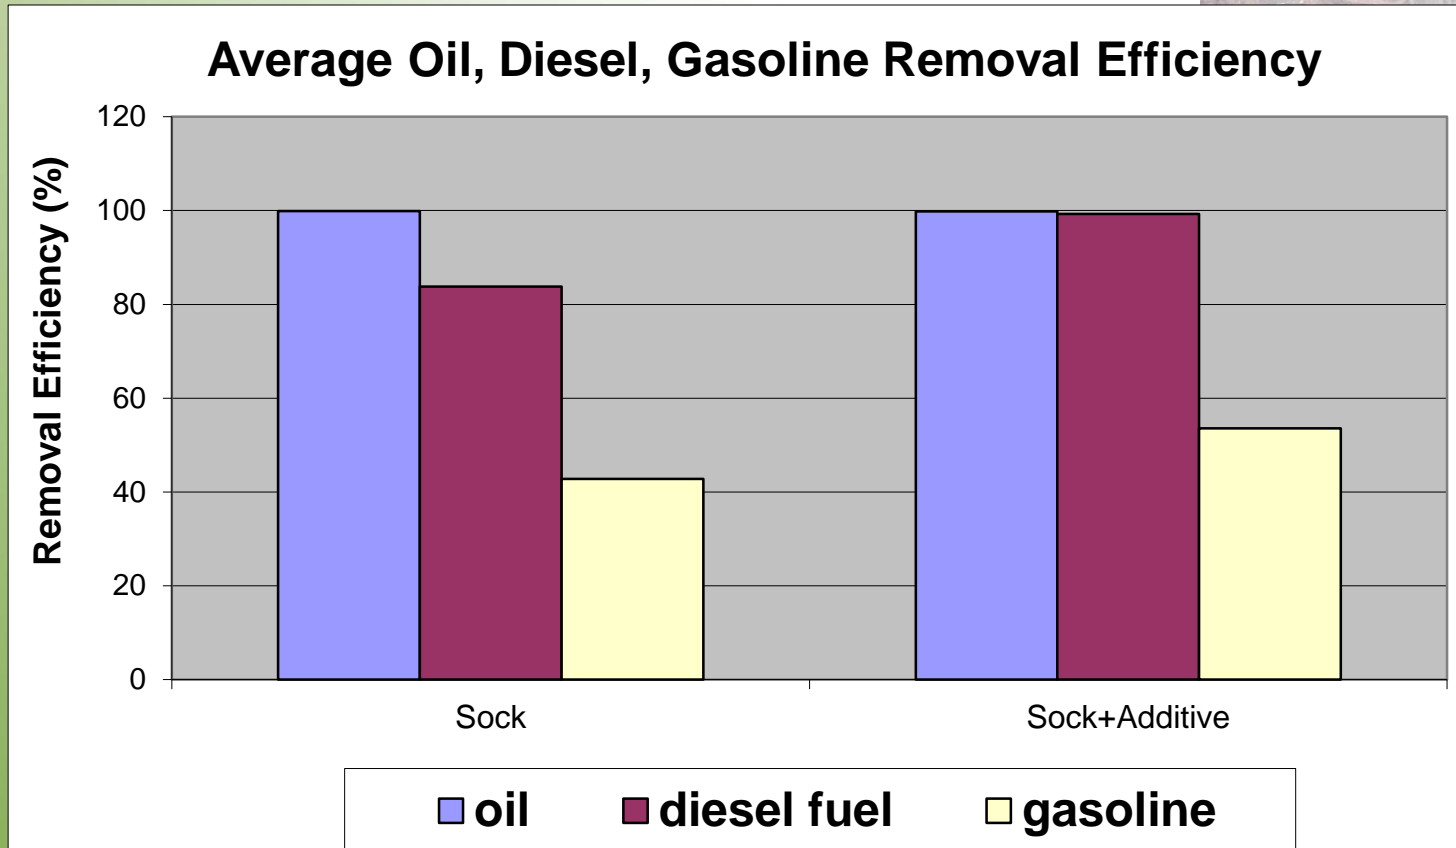

- Runoff Concentrations = 1,400 mg/L (motor oil), 5,400 mg/L (diesel), and 74 mg/L (gasoline)
- Runoff Loads = 20,820 mg (motor oil), 77,440 mg (diesel), and 1070 mg (gasoline)

# City of Chattanooga



Analysis	2-1-2007 (Pre-retrofit)	6-8-2007	8-30-2007	12-13-2007	3-19-2008	1-28-2009	7-28-2009	% Reduction
COD	1600 mg/L	259 mg/L	255 mg/L	125 mg/L	125 mg/L	405 mg/L	214 mg/L	<b>75-93</b>
TSS	1370 mg/L	208 mg/L	38 mg/L	18 mg/L	24 mg/L	249 mg/L	177 mg/L	<b>82-99</b>
Oil/Grease	107 mg/L	27 mg/L	N/A	N/A	5 mg/L	18 mg/L	37 mg/L	<b>65-95</b>



Table of Contents



ACKNOWLEDGMENTS

HOW TO USE THIS MANUAL

FORWARDS

Jean Schwab, US EPA  
Neil Weinstein, Low Impact Development Center

INTRODUCTION

- Storm Water Management in a Changing World
- What is Low Impact Development?
- Designing with Nature: Natural Capital + Ecosystem Services = Sustainable Sites
- Carbon Footprint and Climate Change
- Sustainable Management Practices, Compost Based Solutions

I. EROSION & SEDIMENT CONTROL - CONSTRUCTION ACTIVITIES

1. Sediment Control	8
2. Inlet Protection	14
3. Check Dams	16
4. Concrete Washouts	17
5. Slope Interruption	18
6. Runoff Diversion	19
7. Vegetated Cover	20
8. Erosion Control Blanket	21
9. Sediment Trap	62
10. Riser Pipe Filter	71

II. STORM WATER MANAGEMENT - POST-CONSTRUCTION

1. Storm Water Blankets	76
2. Vegetated Filter Strip	84
3. Engineered Soil	93
4. Channel Protection	102
5. Bank Stabilization	113
6. Biofiltration System	126
7. Rain Gardens	138
8. Green Roof System	147
9. Slope Stabilization	154
10. Vegetated Retaining Walls	159
11. Grout	169
12. Level Spreaders	175
13. Vegetated Gabions	180
14. Bioswale	190

“...an essential tool for engineers, designers, architects, regulators, planners, managers, contractors, consultants, policymakers, builders, and water resource managers.” –  
*Forester Press*

**Britt Faucette, Ph.D., CPESC, LEED AP**

**Director of Research & Technical Services**


**Ph: 404 687 8393**

**[brittf@filtrexx.com](mailto:brittf@filtrexx.com)**






# Runoff + Erosion Control

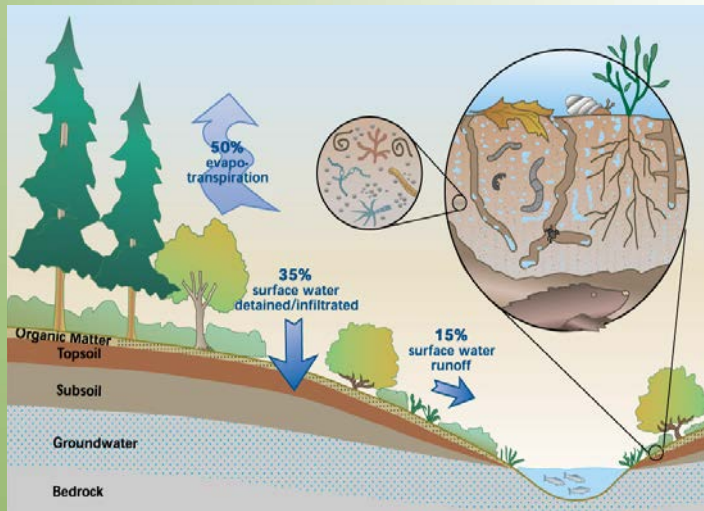

**Designed to:** 1) dissipate energy of rain impact; 2) hold, infiltrate & evaporate water; 3) slow down/disperse energy of sheet flow; 4) provide for optimum vegetation growth



# LID: Rainfall Absorption

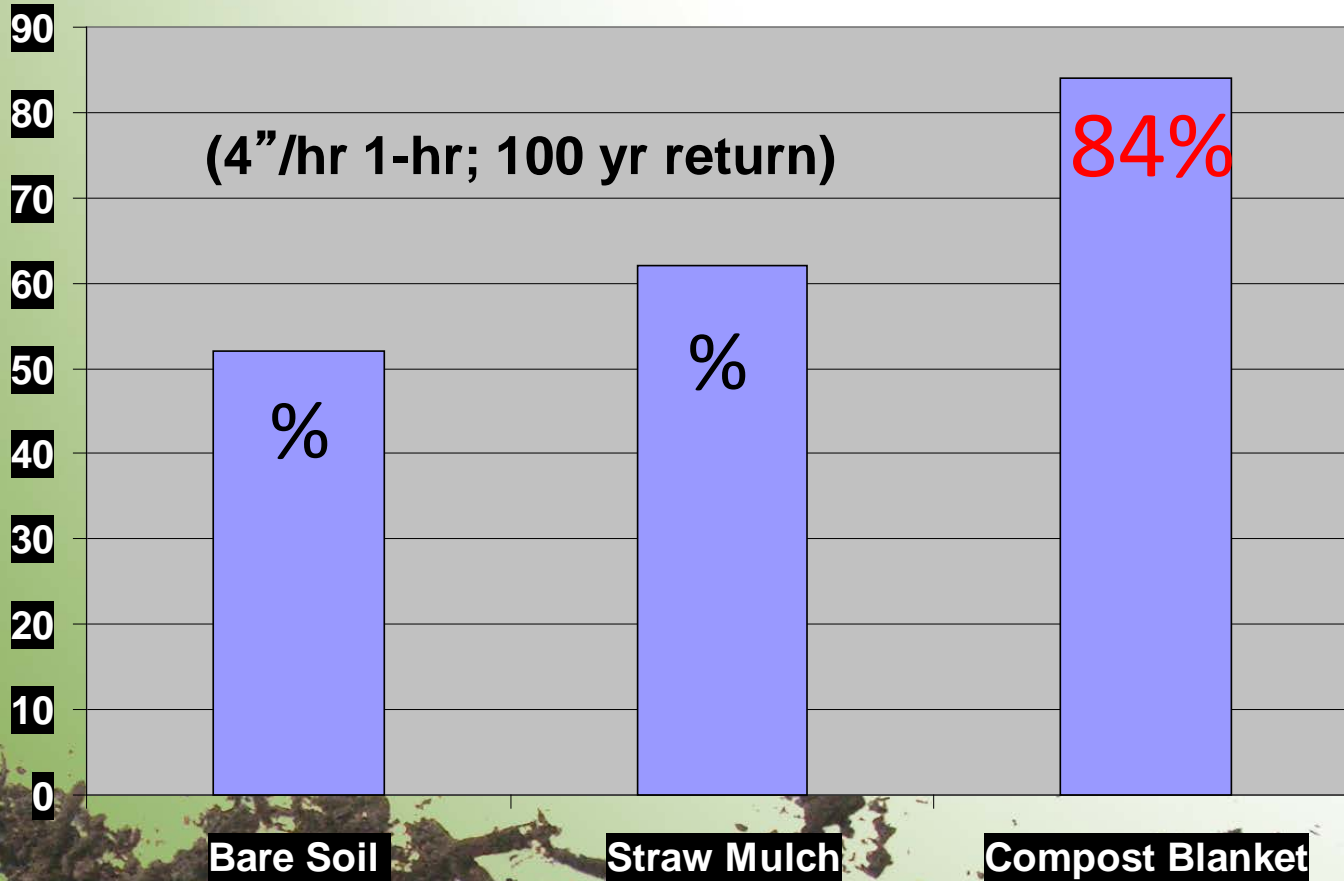

# Runoff Volume Reduction

Reduction	Influencing Factors	Reference
<b>49%</b>	Sandy clay loam, 10% slope, 1.5” blanket, 3.2 in/hr – 1 hr rain	Faucette et al, 2005
<b>60%</b>	Sandy clay loam, 10% slope, 1.5” blanket, 4.0 in/hr – 1 hr rain	Faucette et al, 2007
<b>76%</b>	Silty sand, 2:1 slope, 3” blanket, 1.8 in/hr - 2.4 hr rain	Demars et al, 2000
<b>90%</b>	Loamy sand, 3:1 slope, 2” blanket, 4.0 in/hr – 2 hr rain	Persyn et al, 2004

# Compost Tools

## Filter Media


- Designed for Optimum Filtration & Hydraulic-flow



## Growing Media

- Designed for Optimum Water Absorption & Plant Growth



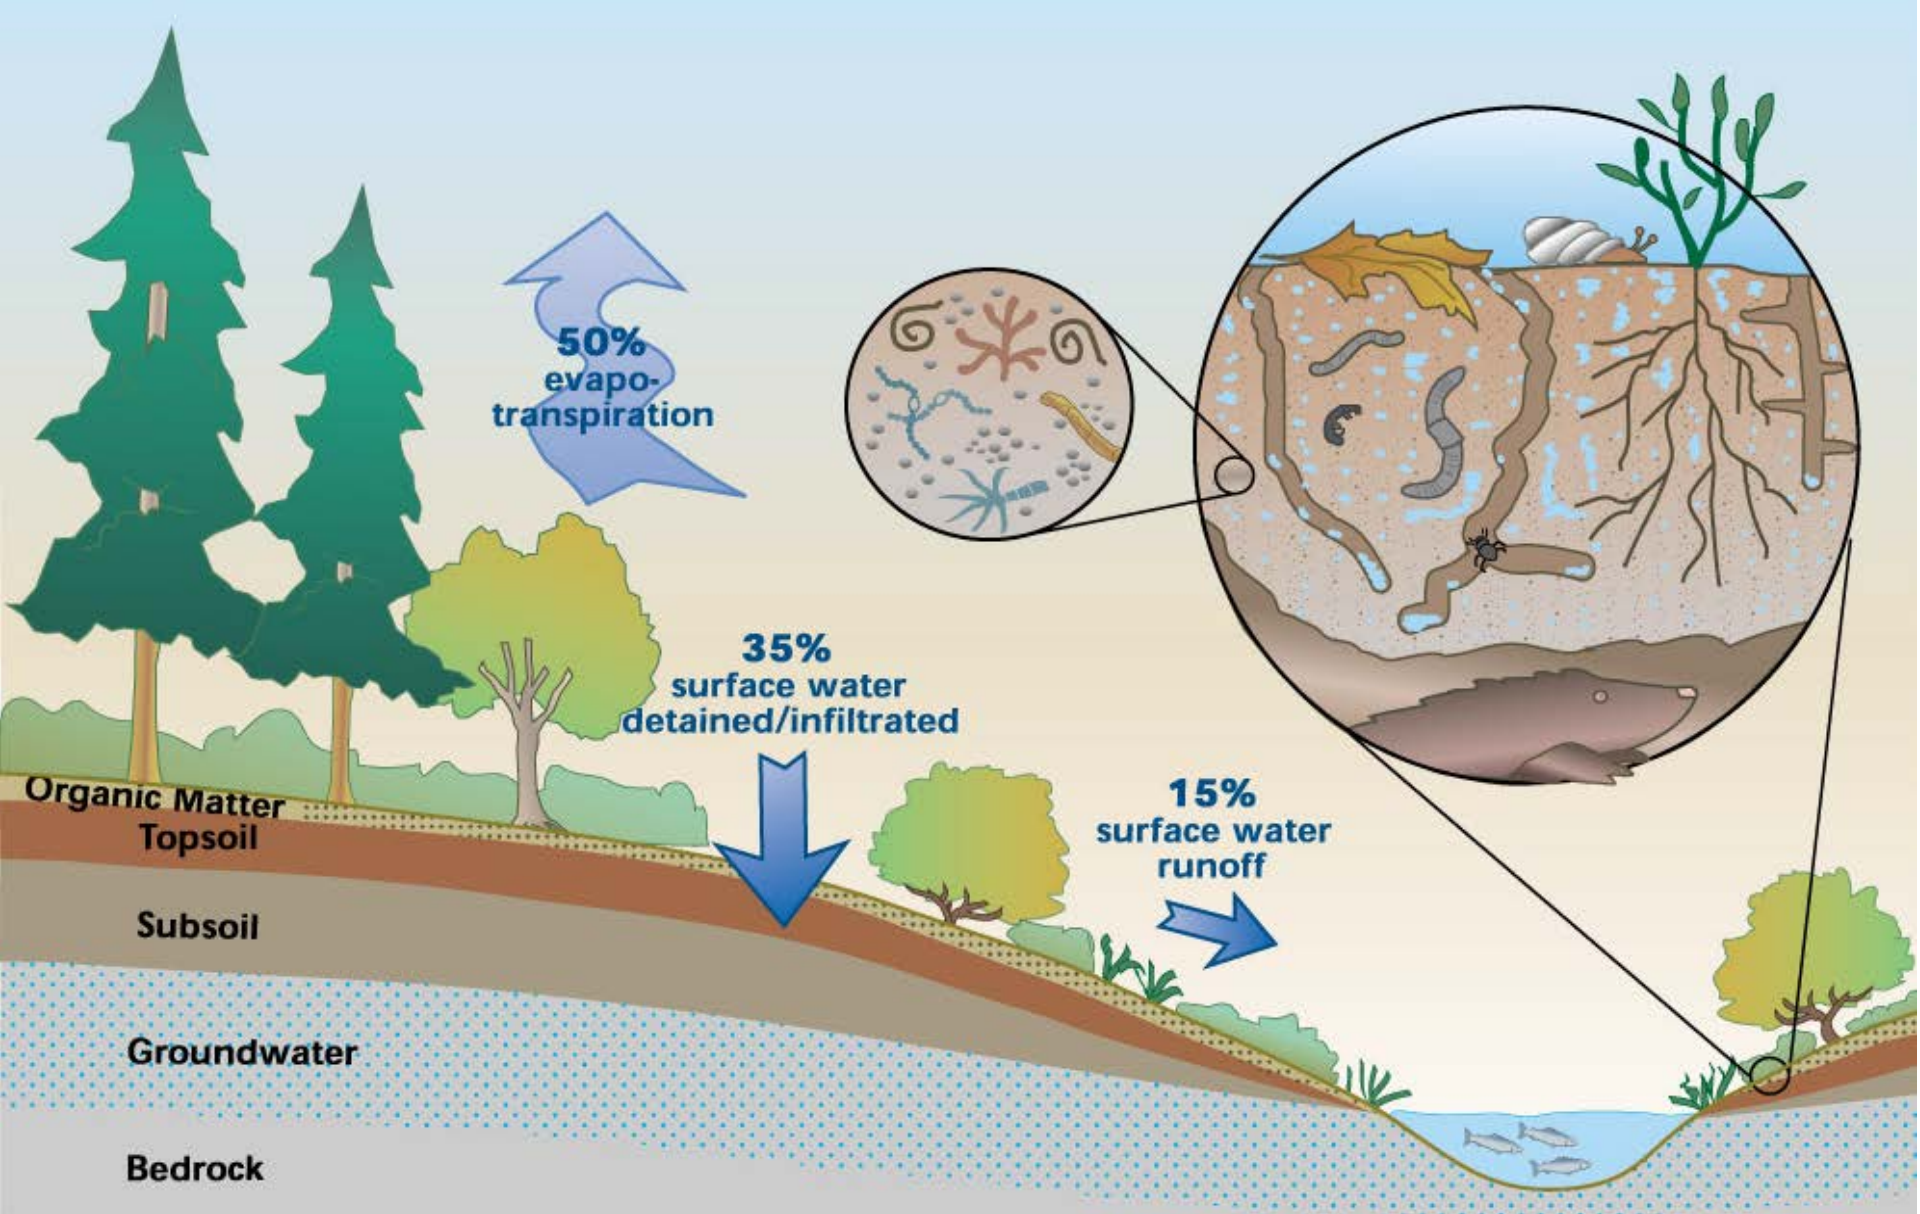

Low Impact Development (LID) =  
restore natural site hydrology; decentralize

# Peak Flow Rate Reduction

Reduction	Influencing Factors	Reference
<b>36%</b>	Sandy clay loam, 10% slope, 1.5” blanket, 3.2 in/hr – 1 hr rain	Faucette et al, 2005
<b>42%</b> (30% relative to straw)	Sandy clay loam, 10% slope, 1.5” blanket, 4.0 in/hr – 1 hr rain	Faucette et al, 2007
<b>79%</b>	Loamy sand, 3:1 slope, 2” blanket, 4.0 in/hr – 2 hr rain	Persyn et al, 2004

# Stormwater BMPs

## Erosion & Sediment Control

1. Perimeter Control
2. Inlet Protection
3. Ditch Check
4. Filter Ring/Concrete washout
5. Slope Interruption
6. Runoff Diversion
7. **Vegetated Cover**
8. **Erosion Control Blanket**
9. Vegetated Sediment Trap
10. Pond Riser Pipe Filter

## Low Impact Development

11. **Runoff Control Blanket**
12. **Vegetated Filter Strip**
13. **Engineered Soil**
14. Channel Liner
15. Streambank Stabilization
16. Biofiltration System
17. **Bioretention System**
18. **Green Roof System**
19. Living Wall
20. Green Retaining Wall
21. **Vegetated Rip Rap**
22. Level Spreader
23. Green Gabion
24. **Bioswale**

# Pollutant Load Reduction



## Compost Blanket vs. Conventional Seeding

	Total N	Nitrate N	Total P	Soluble P	Total Sediment
Mukhtar et al, 2004 (seed+fertilizer)	88%	45%	87%	87%	99%
Faucette et al, 2007 (seed+fertilizer)	92%	ND	ND	97%	94%
Faucette et al, 2005 (hydromulch)	58%	98%	83%	83%	80%
Persyn et al 2004 (seed+topsoil)	99%	ND	99%	99%	96%



# Runoff Curve Numbers

Watershed Surface	Curve Number*
Parking lot, driveway, roof	98
Commercial district	92
Dirt road	82
Residential lot: ¼ ac, ½ ac, 1 ac	75, 70, 68
Cropland	71-81
Pasture	61-79
Public green space	61-69
Woodland and forests	55-66
Brush >75% cover	48
<b>Vegetated Compost Blanket</b>	<b>55</b>

\*Based on Hydrologic Soil Group B

Reference: USDA SCS, 1986

# Ecosystem Services: Economics of Grey vs Green SWM




- Compost Blanket vs Impervious Surface
- Area = 10 acres
- Design Storm = 3 in/24 hr
- ✓ Stormwater Volume = 54,300 vs 752,100 gallons (1400% increase!)
- **Option 1: Containment/Pond:**
- Real Estate Value = \$50,000/acre
- SW Pond Design/Construction = \$1/gal
- ✓ Stormwater Pond (4 ft deep) = 0.5 acre
  - \$25,000 (lost usable real estate)
- ✓ Stormwater Pond Cost = \$697,800 (design/construction)
  - TOTAL = \$722,800



# Ecosystem Services: Economics of Grey vs Green SWM

- Compost Blanket vs Impervious Surface
- Area = 10 acres
- Design Storm = 3 in/24 hr
- ✓ Stormwater Volume = 54,300 vs 752,100 gallons (1400% increase!)
- **Option 2: Off-Site Discharge (Grid):**
- Water Conveyance Cost = \$0.26/gal
- Water Treatment Energy Cost = 2 kWh/1000 gal
- Energy Cost = \$0.13/kWh
- Carbon Emission = 2 lbs CO<sub>2</sub>/kWh
- ✓ Water Conveyance = \$181,428/yr
- ✓ Energy Cost = \$91/year
- ✓ Carbon Emission = 1,396 lbs/CO<sub>2</sub>/yr



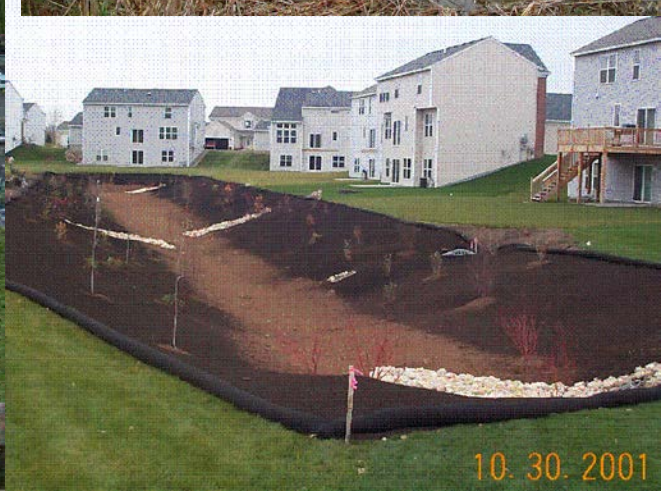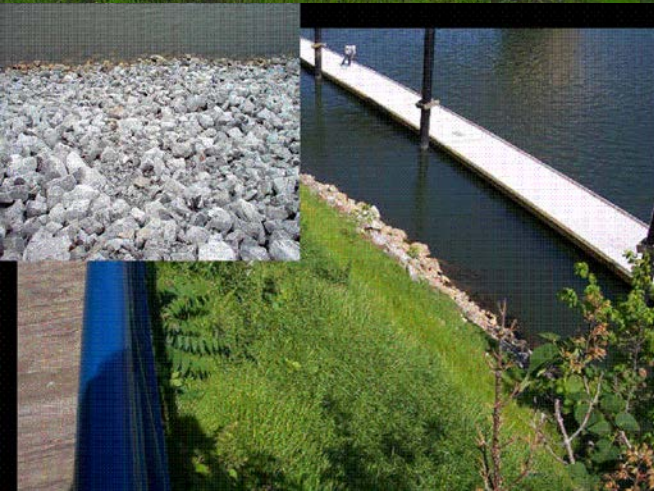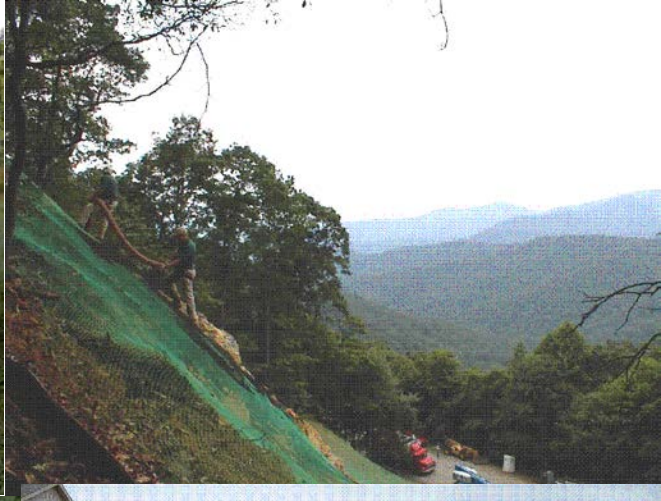


10.30.2001

# Turbidity (NTU)



Average from 4-inch Storm Event

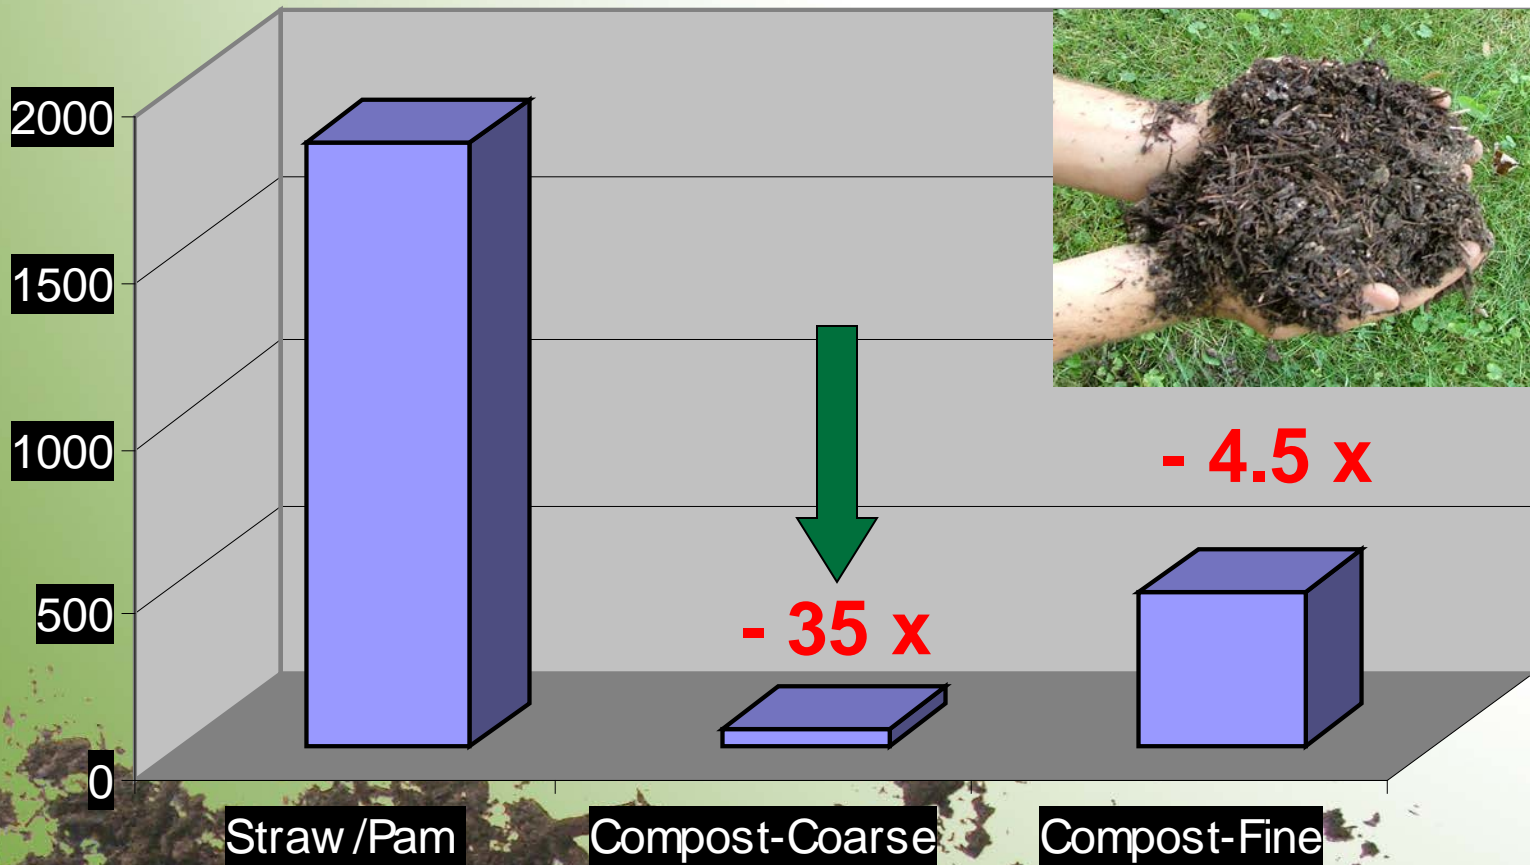

# Soil Erosion at 2:1




Erosion Control Practice	Soil loss @ 2 in/hr 20 min (0.67 in)		Soil loss @ 4 in/hr 40 min (2.0 in)		Soil loss @ 6 in/hr 60 min (4.0 in)	
	t/ac	% reduction	t/ac	% reduction	t/ac	% reduction
Bare soil	61	NA	137	NA	171	NA
<b>CECB 2.0 in</b>	<b>0.02</b>	<b>99.8</b>	<b>46</b>	<b>66.8</b>	<b>48</b>	<b>71.9</b>
CECB 1.0 in	0.09	99.1	53	61.1	53	68.9
CECB 0.5 in	29	52.1	96	30.1	72	57.7
Single-net straw	31	48.8	84	38.3	101	40.8
Single-net excelsior fiber	18	70.2	55	60.1	66	61.1
Double-net straw	23	62.7	62	54.7	76	56.0
<b>Double-net coconut fiber</b>	<b>0.05</b>	<b>99.5</b>	<b>36</b>	<b>73.5</b>	<b>71</b>	<b>58.8</b>
Tackifier	12	79.9	60	56.2	101	41.2
PAM	43	29.9	146	-6.8	158	7.7



# Silt Fence vs Compost Berm




### Mean Total Solids Load for 3 Storm Events

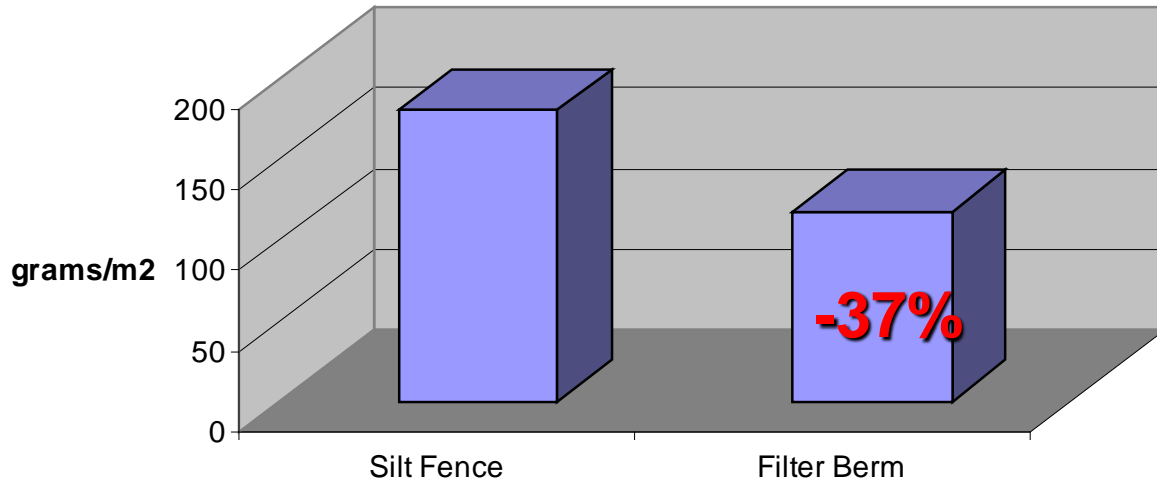

✓ All Plots used Hydromulching



### Nutrient Loads for 2nd Storm Event

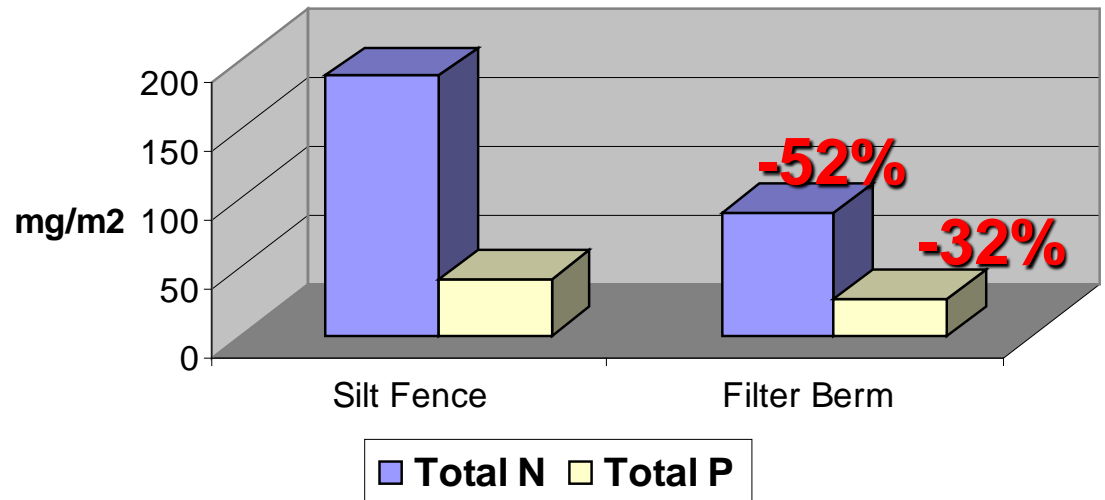



**Compost Blanket**

**Hydroseeding**


**Demo project in Atlanta  
after 3" Storm Event**




# Green Infrastructure & Pollutant Reduction *Design*

## How?

1. Interception
2. Transpiration
3. Infiltration
4. Evaporation
5. Surface Roughness
6. Flow Path Disruption
7. Biofiltration

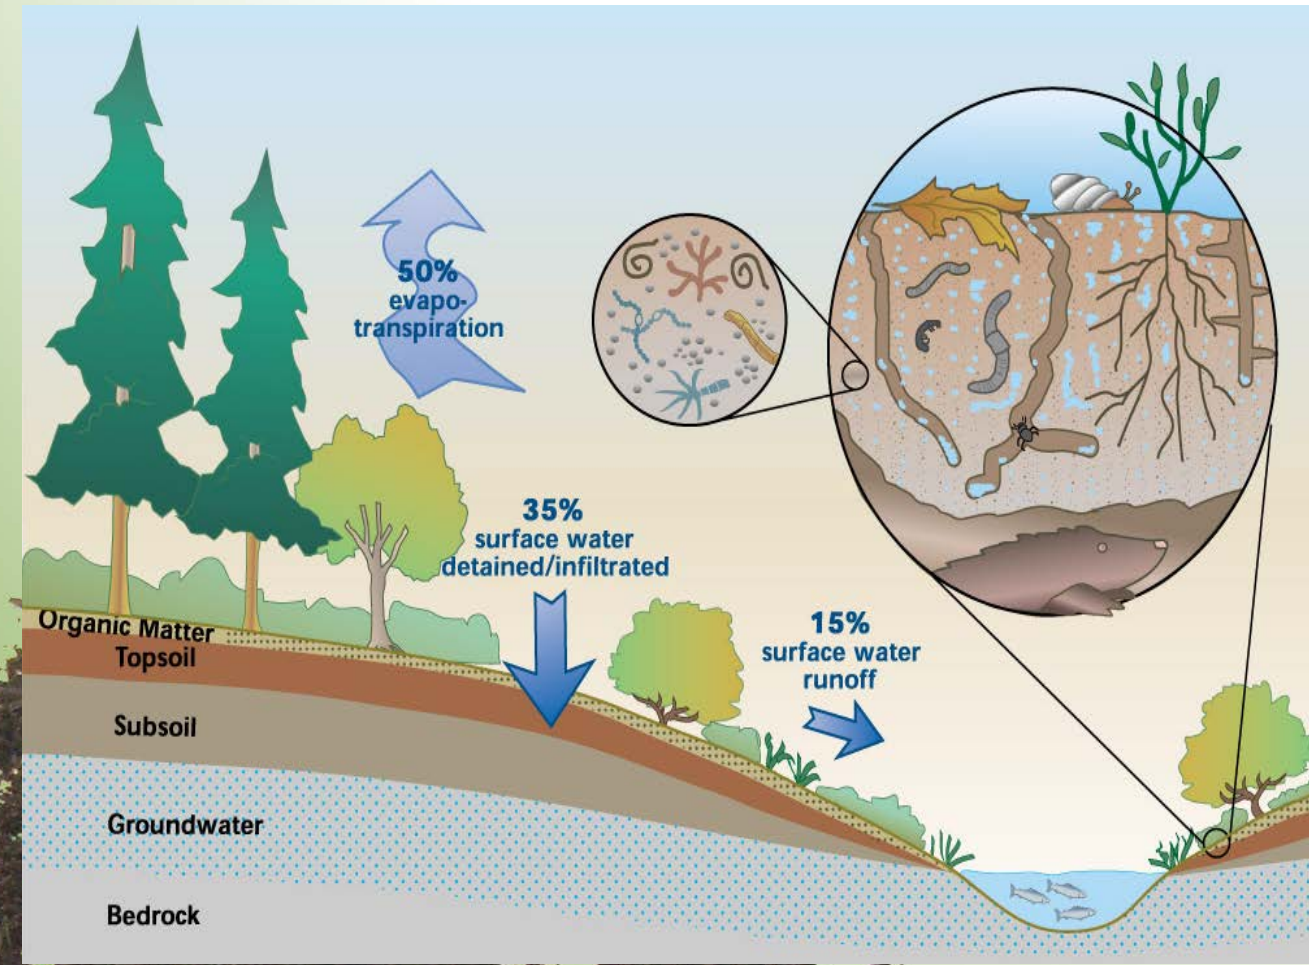

# Green Infrastructure Site = Max Pollutant Load Reduction

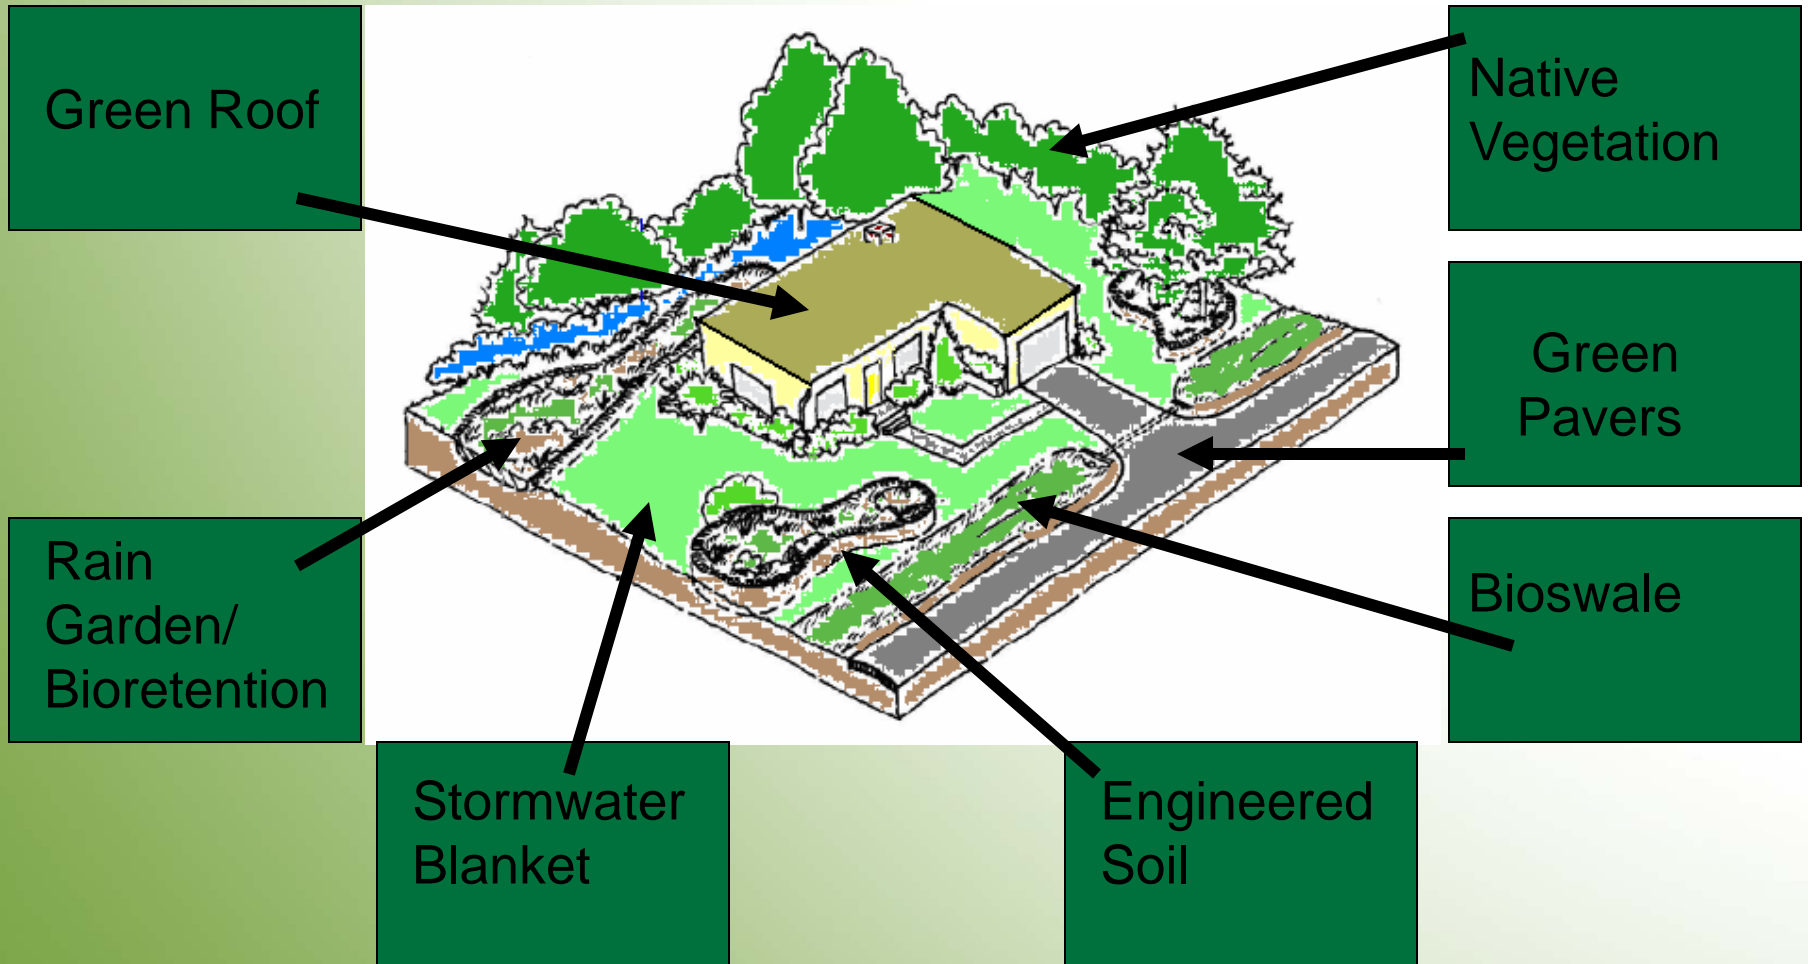




 **Southface**

Responsible Solutions for Environmental Living

**Eco Office**  
Grand Opening  
August 18, 2009



- ✓ 100% rain/stormwater capture
- ✓ Zero discharge
- ✓ 84% Water Savings
- ✓ 130,000 gal/yr

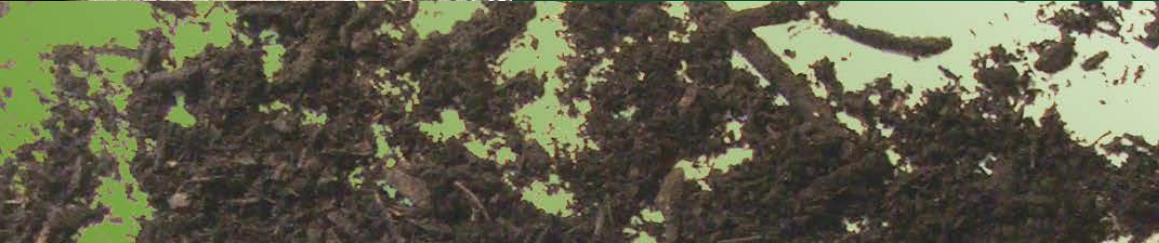



 **Southface**

Responsible Solutions for Environmental Living



# Real Value of Green Infrastructure

- National average real estate values down 25% from 2007 (-\$82,000)
- Low Impact Development Sites:
  - \$5000 more value/lot
  - \$4000 less cost/lot
  - 6% - green infrastructure
  - 15% - water quality
  - 5% - reduce flooding in flood plain
  - 33-50% energy savings



(Source: NCSU)

# Runoff Coefficients

Watershed Surface	Coefficient
Asphalt, concrete, rooftop, downtown area	0.95
Neighborhood, apartment homes	0.7
Single family home site	0.5
Bare graded soil –clay, silt, sand	0.6, 0.5, 0.3
Lawn, pasture	0.1 – 0.35
Undisturbed forest	0.15
<b>Compost blanket</b>	<b>0.1 – 0.32 (0.28)</b>

# Design: CECB Thickness based on Slope & 24 Rainfall Total

Slope Angle ( $\leq$ )	Rainfall = 1.0 in	Rainfall = 2.0 in	Rainfall = 4.0 in
4:1	½ in	2 in	2 in
3:1	½ in	1 in	2 in
2:1	1 in	1 in	1 in

# RECP + Hydromulch

Compost  
Blanket



Compost Fills in  
the Low Spaces





# The *Sustainable* BMP

- 100% Recycled (compost)
- Bio-based, organic materials
- Locally manufactured
- Reduces Carbon Footprint
- Uses Natural Principles
- (Natural Capital & Ecosystem Services)
- High Performance

# Real Value of Green Infrastructure

- National average real estate values down 25% from 2007 (-\$82,000)
- Low Impact Development Sites:
  - \$5000 more value/lot
  - \$4000 less cost/lot
  - 6% - green infrastructure
  - 15% - water quality
  - 5% - reduce flooding in flood plain
  - 33-50% energy savings



(Source: NCSU)



# Compost Filter Socks: Green Infrastructure & Stormwater Quality

Britt Faucette, Ph.D., CPESC, LEED AP  
Ecosystem Scientist

July 18, 2014

# Results: CECB Thickness & Slope Steepness

CECB Thickness (in)	Slope Angle (H:V)	Soil loss @ 2 in/hr 20 min (0.67 in)		Soil loss @ 4 in/hr 40 min (2.0 in)		Soil loss @ 6 in/hr 60 min (4.0 in)	
		t/ac	% reduction	t/ac	% reduction	t/ac	% reduction
<b>Bare soil</b>	<b>2:1</b>	61	NA	137	NA	171	NA
<b>2.0</b>	<b>2:1</b>	0.02	<b>99.8</b>	46	<b>66.8</b>	48	<b>71.9</b>
<b>1.0</b>	<b>2:1</b>	0.9	<b>99.1</b>	53	<b>61.1</b>	53	<b>68.9</b>
<b>0.5</b>	<b>2:1</b>	29	<b>52.1</b>	96	<b>30.1</b>	72	<b>57.7</b>
<b>Bare soil</b>	<b>3:1</b>	55	NA	132	NA	144	NA
<b>2.0</b>	<b>3:1</b>	0.09	<b>99.0</b>	26	<b>80.1</b>	35	<b>75.7</b>
<b>1.0</b>	<b>3:1</b>	0.25	<b>97.4</b>	18	<b>86.4</b>	72	<b>50.4</b>
<b>0.5</b>	<b>3:1</b>	0.9	<b>90.0</b>	94	<b>29.1</b>	100	<b>30.5</b>
<b>Bare soil</b>	<b>4:1</b>	72	NA	108	NA	110	NA
<b>2.0</b>	<b>4:1</b>	0.005	<b>100.0</b>	9	<b>91.4</b>	19	<b>82.6</b>
<b>1.0</b>	<b>4:1</b>	0.37	<b>96.8</b>	42	<b>61.4</b>	60	<b>45.9</b>
<b>0.5</b>	<b>4:1</b>	0.25	<b>98.2</b>	56	<b>48.4</b>	68	<b>38.0</b>



# USLE C Factors

$$A = R \times K \times LS \times \underline{C} \times P$$

Erosion Control	C Factor	Reference
Bare Soil	1.0	
Wood Mulch	0.08-0.16	Demars and Long, 1998; Faucette et al, 2004
Straw Mulch	0.08-0.19	Demars and Long, 1998; Faucette et al, 2006
<b>Compost Blanket</b>	<b>0.01- 0.07</b>	Mukhtar et al, 2004; Demars and Long, 1998; Demars et al, 2000; Faucette et al 2005; Faucette et al, 2006
Forest floor	0.001	GA SWCC, 2000

# Hydraulic Design Capacity of Filter Socks & Silt Fence in Runoff Control Applications

H. Keener, B. Faucette, M. Klingman

Flow through rates were 50% greater for filter socks

12" Compost sock = 24" silt fence

18" Compost sock = 36" silt fence



# Filter Sock Design Tool

Step 1: Choose units, **ft** or **m**

Step 2. Choose input: **Tr** or **I**

**total rainfall**

**inches**

ft

Tr

1.5

**storm duration**

**hours**

24

Step 3. Choose input: **A** or **W**

**width of area**

**ft**

400.00

**length of slope**

**ft**

250

43560

Step 4. Input slope

%

10

452.588

Step 5. Input reduction runoff percent

%

10

Step 6. Input effective length of filter

**ft**

400

silt fence(24,30)

400

Step 7. Input diameter/height of filter

**inches**

12

36

Step 8. Find time to overflow filter and total flow/ft the filter can handle

Step 9. On figure find  $q_i$  for given flow

expected time to overflow filter.


## Part A. Evaluation of $q_i$

I	A	s	Q	$L_{ss}$	$q_i$
inches/hr	acres	percent	gpm	ft	gpm/ft
0.063	2.2957	10	58.15	400	0.145

## Part B. Predicted time and total flow to top filter.

	$q_o$	D	Effective D	time overflow	total flow	Filter Okay
	gpm/ft	inches	inches	hr	gal/f	time > tr
SiltSoxx™ (Coarse Material)	0.145	12	9.6	99.1	865	OKAY
Silt Fence	0.145	36	30.6	97.5	851	OKAY



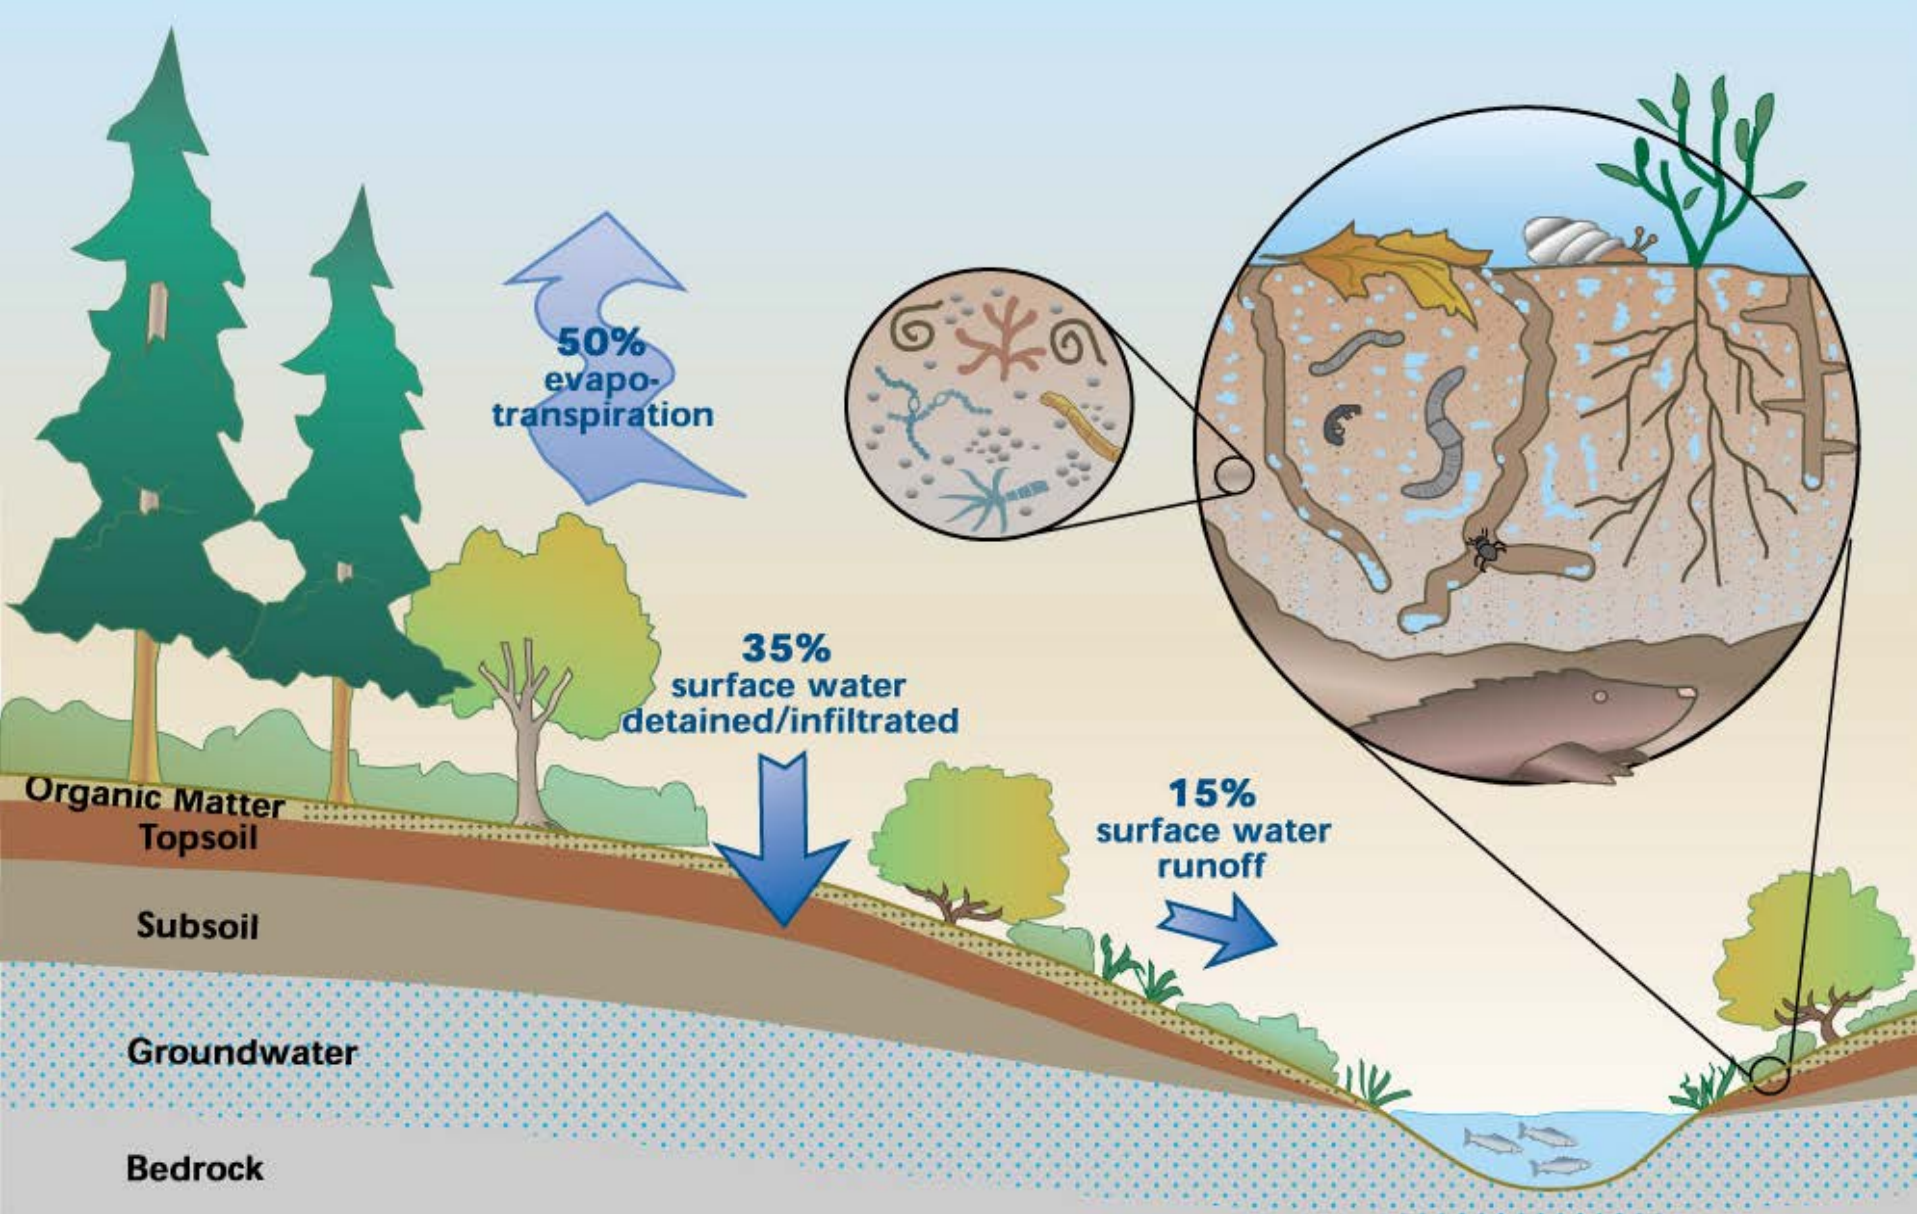

Low Impact Development (LID) =  
restore natural site hydrology; decentralize



# Total Soil Loss



The University of Georgia

Hydromulch vs Compost Blanket:  
Two 3" /hr storm events

- ✓ Day 1 = **2,750 & 1,230 lb/ac**
- ✓ 3 mo = **1,960 & 115 lb/ac**





# Particle Size Matters

Treatment	Soil Loss (kg ha <sup>-1</sup> )	TSS (kg ha <sup>-1</sup> )	Turbidity (NTU)	Particle size % passing		
				1 in	1/2 in	1/4 in
Compost 1	95.8	52.1	36	99	64	30
Compost 2*	129.2	60.4	60	99	85	67
Compost 3*	208.3	64.6	87	99	89	76
Compost 4**	408.3	283.3	288	99	99	95

\*Did not meet TX DOT specification for erosion control compost particle size distribution.

\*\*Did not meet TX DOT, USEPA, IN DNR, or CONEG specification for erosion control blanket particle size distribution